

Emergency LED Hanging Sign 3W, recessed with adjustable suspension wires, selectable self-test function, IP20


Technical Specification:

Primary Materials	PC/Aluminium Housing, Acrylic Sign
Emergency Operation	Maintained or Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Impact Resistance	IK07
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years



Dimensions:

Hanging sign, recessed & suspended

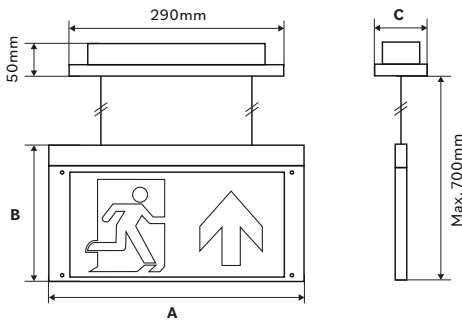


Supplied with interchangeable 'Arrow-up' legend: ISO Pictogram
Maximum viewing distance: 24m

Product Range Data:

Part No.	Power	Colour Temperature	Dimensions A x B x C	Cut out	Max Suspension	Viewing Distance	IP Rating	Weight
LXEHS/RS/S	3W	6000K	300 x 200 x 65mm	280 x 50mm	700mm	24m	IP20	0.83kg

PVC ISO Pictogram:

Part No.	Description
LXEHS/L/AU	Legend Arrow Up
LXEHS/L/AD	Legend Arrow Down
LXEHS/L/ALR	Legend Arrow Left/Right



Replacement Battery

Part No.	Description
LXEHS/S/EBK/LI/1800	Battery Kit for LXEHS/RS/S

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXEHSRSV3.3.25