

Recessed, slim hanging exit sign. Ideal for 3 Hour emergency lighting applications such as; open area, escape route and exits.


Technical Specification:

Primary Materials	PC/Aluminium Housing, Acrylic Sign
Emergency Operation	Selectable Self-test, Maintained or Non-Maintained
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	50,000h
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years



Dimensions:

Hanging sign recessed suspended

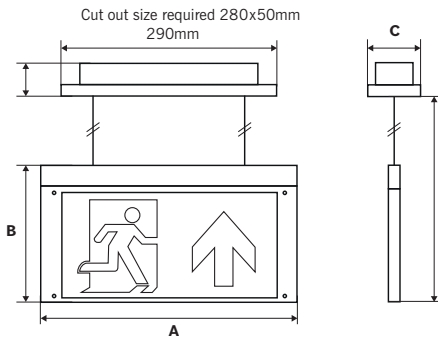


Supplied with interchangeable 'Arrow-up' legend

Product Range Data:

Part No.	Power	Colour Temperature	Dimensions A x B x C	Cut out	Max Suspension	Viewing Distance	IP Rating	Ra
LXEHS/RS/S	3W	6000K	300 x 200 x 65mm	280 x 50mm	700mm	24m	IP20	>80

PVC ISO Pictogram:

Part No.	Description
LXEHS/L/AU	Legend Arrow Up
LXEHS/L/AD	Legend Arrow Down
LXEHS/L/ALR	Legend Arrow Left/Right



Replacement Battery

Part No.	Description
LXEHS/S/EBK/LI/1800	Battery Kit for LXEHS/RS/S

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXEHSRSV3.8.24