

Hinged multi-mount, slim hanging exit sign. Ideal for 3 Hour emergency lighting applications such as; open area, escape route and exits


## Technical Specification:

Primary Materials	PC/Aluminium Housing, Acrylic Sign
Emergency Operation	Selectable Self-test, Maintained or Non-Maintained
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	50,000h
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years



## Dimensions:

Hanging sign multi-mount

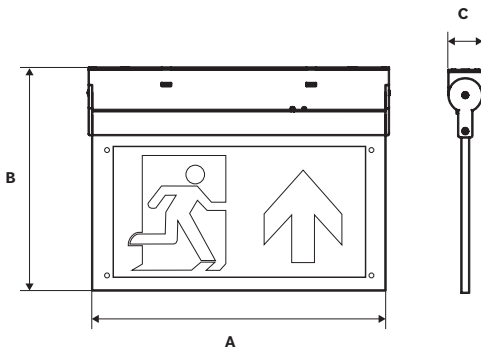

Using accessory 'Side-Mounting Arm'




Supplied with interchangeable 'Arrow-up' legend

## Product Range Data:

Part No.	Power	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Ra
LXEMME/S	3W	6000K	300 x 233 x 35mm	24m	IP20	>80

## PVC ISO Pictogram & Accessories:

Part No.	Description
LXEMME/L/AU	Legend Arrow Up
LXEMME/L/AD	Legend Arrow Down
LXEMME/L/ALR	Legend Arrow Left/Right
LXEMME/SMA	Side-Mounting Arm



## Replacement Battery

Part No.	Description
LXEBH/S/EBK/LI/1500	Battery Kit for LXEMME/S

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXEMMEV3.8.24