

Emergency LED Twin Spotlight 6W, adjustable lamp heads, selectable self-test function, IP65


Technical Specification:

Primary Materials	Polycarbonate base and diffuser
Emergency Operation	Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP65
Impact Resistance	IK09
Safety Class Rating	Class I
Operating Temperature	0°C to 50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFePO4 3.2V 6000mAh
Warranty*	5 Years




Dimensions:

Twin Spot

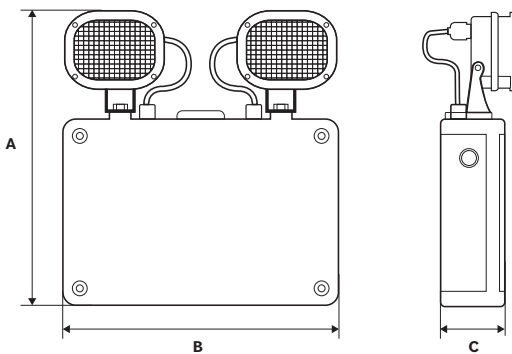

Light Distribution Curve:

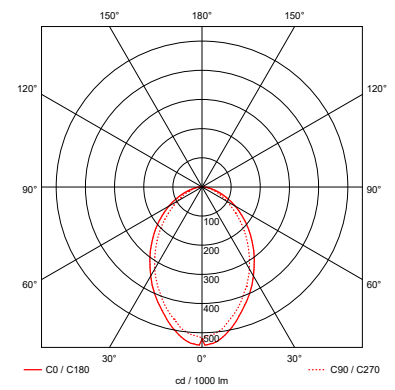

(Single Lamp Head)

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	IP Rating	Weight
LXETS/S	2 x 3W	500Lm	6000K	300 x 280 x 70mm	IP65	1.17kg

Replacement Battery

Part No.	Description
LXETS/EBK/LI/6000	Battery Kit for LXETS/S

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXEBHV3.3.25