

Emergency LED Bulkhead High-output 12W, wall or ceiling mounted, selectable self-test function, IP65


Technical Specification:

Primary Materials	Polycarbonate housing and diffuser
Emergency Operation	Maintained or Non-Maintained, Selectable Self-Test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP65
Impact Resistance	IK08
Safety Class Rating	Class I
Operating Temperature	0°C to +50°C
LED Lifetime	30,000hrs - L70/B50 (Ta25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 6.4V 6000mAh
Warranty*	5 Years




Dimensions:

Bulkhead

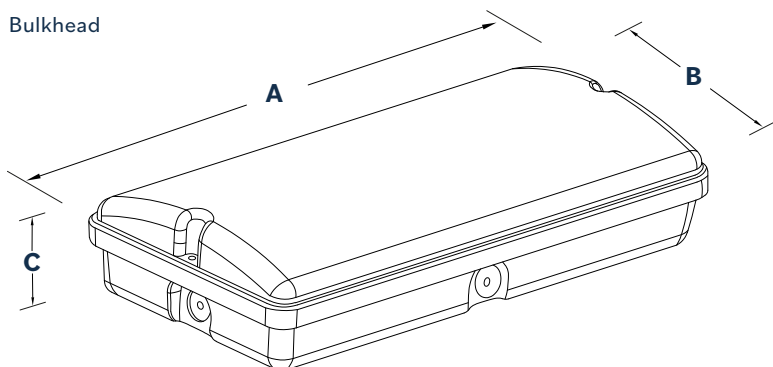

Light Distribution Curve:

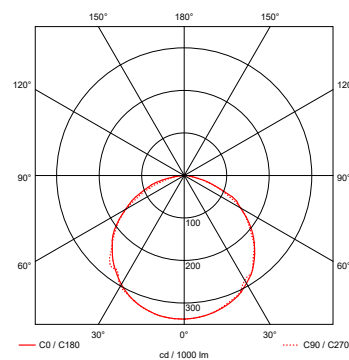

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	IP Rating	Class Rating	Weight
LXEBH/HO/S	12W	1100lm	6000K	338 x 168 x 75mm	IP65	Class I	1.26kg

Replacement Battery

Part No.	Description
LXEBH/HO/EBK/LI/6000	Battery Kit for LXEBH/HO - LiFeP04 6.4V 6000mAh

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXEBH/HOV1.9.25