

Emergency LED Compact Bulkhead 3W, wall or ceiling mounted, IP65

## Technical Specification:


Primary Materials	Polycarbonate housing and diffuser
Emergency Operation	Maintained or Non-Maintained
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP65
Impact Resistance	IK08
Safety Class Rating	Class II
Operating Temperature	0°C to +50°C
LED Lifetime	30,000hrs - L70/B50 (Ta25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years




Supplied with universal legend kit: ISO Pictogram  
Maximum viewing distance: 18m

## Dimensions:

Bulkhead

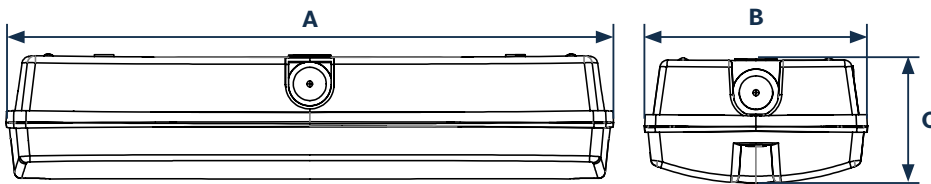

## Light Distribution Curve:

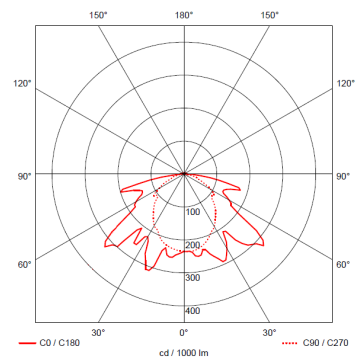

## Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Class Rating	Weight
LXEBHC	3W	150lm	6000K	300 x 110 x 66mm	18m	IP65	Class II	0.45kg

## PVC ISO Pictogram

Part No.	Description
LXEBH/LK	Universal Legend Kit - Up, Down, Left or Right direction



## Replacement Battery

Part No.	Description
LXEBH/S/EBK/LI/1800	Battery Kit for LXEBH/S & LXEBH/LXEBHC - LiFeP04 3.2V 1800mAh

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at  $\pm 10\%$ . The data values apply to an ambient temperature of  $+25^{\circ}\text{C}$ . Specification details are subject to change without prior notification. E&OE. LXEBHCV1.9.25