

Emergency LED Surface Downlight Square 3W, selectable self-test function, IP20

Technical Specification:

Primary Materials	Polycarbonate
Emergency Operation	Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Impact Resistance	IK06
Safety Class Rating	Class II
Operating Temperature	0°C to +50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years


SELECTABLE EMERGENCY FUNCTION Manual Or Self-Test	EM3 EMERGENCY DURATION 3 HOURS	IP20	IK06	RATED LIFE 30,000 HRS	5 YEAR WARRANTY	
--	---	------	------	--------------------------	-----------------------	--




Supplied with Open Area and Corridor Lens

Dimensions:

Surface Downlight Square

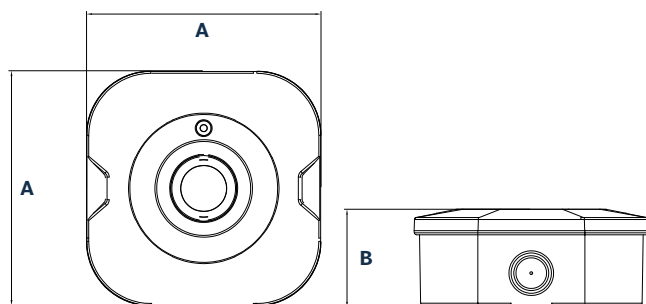

Light Distribution Curve:

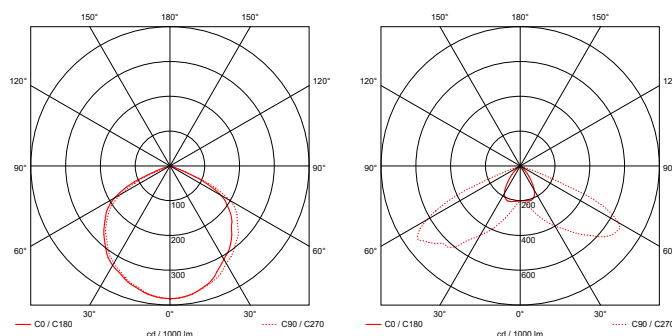

Open Area Lens


Corridor Lens

Product Range Data:

Part No.	Colour Finish	Power	Lumen Output	Colour Temperature	Dimensions A x B	IP Rating	Class Rating	Weight
LXESDS/W/S	White	3W	150lm	6000K	110 x 110 x 46mm	IP20	Class II	0.25kg
LXESDS/B/S	Black	3W	150lm	6000K	110 x 110 x 46mm	IP20	Class II	0.25kg

Replacement Battery

Part No.	Description
LXESD/EBK/LI/1800	Battery Kit for LXESDS & LXESDR - LiFeP04 3.2V 1800mAh



1. Open Area Lens
2. Corridor Lens

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^\circ\text{C}$. Specification details are subject to change without prior notification. E&OE. LXESDSV1.9.25