

Emergency LED Twin Spotlight 3W, adjustable lamp heads, selectable self-test function, IP20

## Technical Specification:


|                           |                                      |
|---------------------------|--------------------------------------|
| Primary Materials         | Polycarbonate                        |
| Emergency Operation       | Non-Maintained, Selectable Self-test |
| Colour Temperature        | 6000K                                |
| Colour Rendering Index    | Ra>80                                |
| Ingress Protection        | IP20                                 |
| Impact Resistance         | IK07                                 |
| Safety Class Rating       | Class II                             |
| Operating Temperature     | 0°C to +50°C                         |
| LED Lifetime              | 30,000h L70/B50 (Ta 25°C)            |
| Emergency Duration        | 3 Hours                              |
| Input Voltage & Frequency | AC220-240V 50/60Hz                   |
| Battery                   | LiFeP04 3.2V 3000mAh                 |
| Warranty*                 | 5 Years                              |

|                                                                     |                                                |             |             |                                 |                                |  |
|---------------------------------------------------------------------|------------------------------------------------|-------------|-------------|---------------------------------|--------------------------------|--|
| <b>SELECTABLE<br/>EMERGENCY<br/>FUNCTION</b><br>Manual Or Self-Test | <b>EM3</b><br>EMERGENCY<br>DURATION<br>3 HOURS | <b>IP20</b> | <b>IK07</b> | <b>RATED LIFE</b><br>30,000 HRS | <b>5<br/>YEAR<br/>WARRANTY</b> |  |
|---------------------------------------------------------------------|------------------------------------------------|-------------|-------------|---------------------------------|--------------------------------|--|




## Dimensions:

Twin Spot

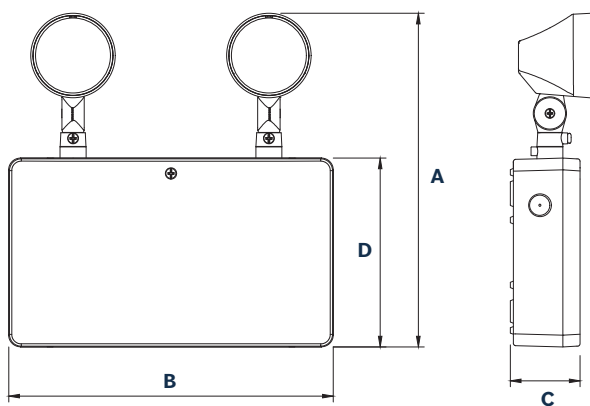

## Light Distribution Curve:

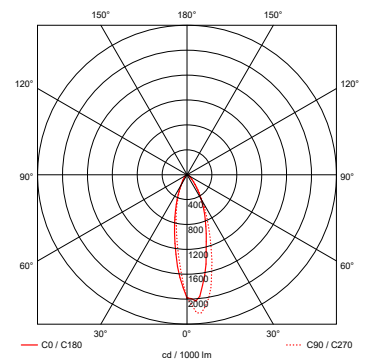

## Product Range Data:

| Part No.    | Colour Finish | Power | Lumen Output | Colour Temperature | Dimensions A x B x C x D | IP Rating | Class Rating | Weight |
|-------------|---------------|-------|--------------|--------------------|--------------------------|-----------|--------------|--------|
| LXETS/3/W/S | White         | 3W    | 300Lm        | 6000K              | 283 x 275 x 59 x 160mm   | IP20      | Class II     | 0.8kg  |
| LXETS/3/B/S | Black         | 3W    | 300Lm        | 6000K              | 283 x 275 x 59 x 160mm   | IP20      | Class II     | 0.8kg  |

## Replacement Battery

| Part No.          | Description                                             |
|-------------------|---------------------------------------------------------|
| LXETS/EBK/LI/3000 | Battery Kit for LXETS/3/W or B/S - LiFeP04 3.2V 3000mAh |



Black  
Colour  
Finish

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at  $\pm 10\%$ . The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXETS/3V1.9.25