

3 Hour Emergency Remote Pack, IP20, for use with LED downlights

Technical Specification:


Primary Materials	Polycarbonate
Emergency Operation	Non-maintained / Maintained
Ingress Protection	IP20
Safety Class Rating	Class II
Operating Temperature	0°C to +50°C
Battery Charge Time	24 Hours
Emergency Duration	3 Hours
EM LED Power (Typical)	1-2W
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 6.4V 2000mAh
Warranty*	5 Years



Supplied with Green LED charge indicator and mounting clip

Dimensions:

Emergency Remote Pack

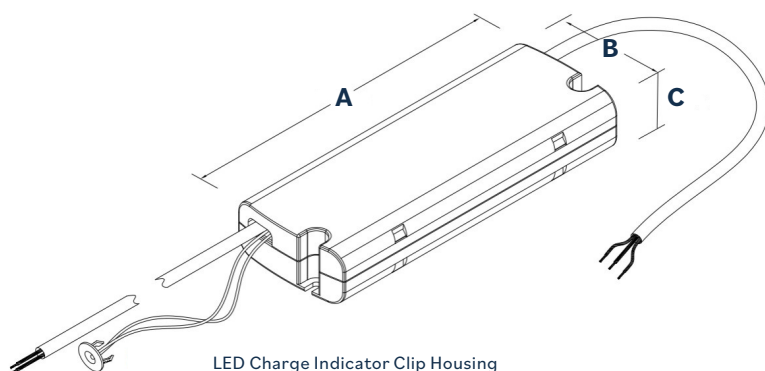

LED Charge Indicator Clip Housing

Product Range Data:

Part No.	Power	Dimensions A x B x C	IP Rating	Class Rating	Weight
LXERPD/230/EM3	1-2W	160 x 60 x 26mm	IP20	Class II	0.25kg

Accessories:

Part No.	Description
LXLPF2-ELC-W	LED Indicator Clip Housing - White



Compatible Products:

Part No.	Description
LXFRD/5-7/CCT4/P	Fire Rated Downlight, LED, 5-7W, Pro
LXFRD/5-7/CCT4	Fire Rated Downlight, LED, 5-7W
LXFRD/5-7/CCT4/T	Fire Rated Downlight, LED, 5-7W, Tilt
LXFRD/6/CCT3	Fire Rated Downlight, LED, 6W

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXERPD/230/EM3V2.9.25