

Emergency LED Exit Box 4W, wall mounted, selectable self-test function, IP20


Technical Specification:

Primary Materials	Polycarbonate Housing, PVC legend
Emergency Operation	Maintained or Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Impact Resistance	IK05
Safety Class Rating	Class I
Operating Temperature	0°C to +50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years



Dimensions:

Exit Box

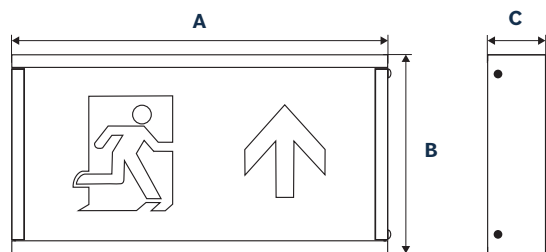


Supplied with interchangeable
'Arrow-up' legend: ISO Pictogram
Maximum viewing distance: 30m

Product Range Data:

Part No.	Colour Finish	Power	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Class Rating	Weight
LXEED/S	White	4W	6000K	390 x 190 x 60mm	30m	IP20	Class I	0.74kg
LXEED/B/S	Black	4W	6000K	390 x 190 x 60mm	30m	IP20	Class I	0.74kg

PC ISO Pictogram:

Part No.	Description
LXEED/L/AU	Legend Arrow Up
LXEED/L/AD	Legend Arrow Down
LXEED/L/AR	Legend Arrow Right
LXEED/L/AL	Legend Arrow Left



Replacement Battery

Part No.	Description
LXEED/EBK/LI/1800	Battery Kit for LXEEB/S or /B/S - LiFeP04 3.2V 1800mAh



Black
Colour
Finish

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $\pm 25^\circ\text{C}$. Specification details are subject to change without prior notification. E&OE. LXEEB V4.9.25