

Emergency LED Hanging Sign 3W, hinged base for ceiling and wall mounting options, and selectable self-test function, IP20


## Technical Specification:

Primary Materials	PC/Aluminium Housing, Acrylic Sign
Emergency Operation	Maintained or Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Impact Resistance	IK07
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFeP04 3.2V 1800mAh
Warranty*	5 Years



## Dimensions:

Hanging sign multi-mount

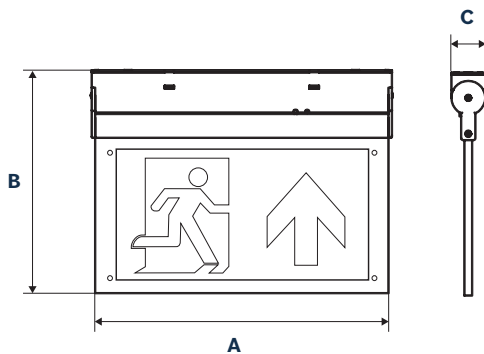

Supplied with interchangeable  
'Arrow-up' legend: ISO Pictogram  
Maximum viewing distance: 24m

## Product Range Data:

Part No.	Colour Finish	Power	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Class Rating	Weight
LXEMME/S	White	3W	6000K	300 x 233 x 35mm	24m	IP20	Class II	0.83kg
LXEMME/B/S	Black	3W	6000K	300 x 233 x 35mm	24m	IP20	Class II	0.83kg

## PVC ISO Pictogram & Accessories:

Part No.	Description
LXEMME/L/AU	Legend Arrow Up
LXEMME/L/AD	Legend Arrow Down
LXEMME/L/ALR	Legend Arrow Left/Right
LXEMME/SMA	Side-Mounting Arm



## Replacement Battery

Part No.	Description
LXEHS/LXEMME/EBK/LI/1800	Battery Kit for LXEMME/S or /B/S - LiFeP04 3.2V 1800mAh



Black  
Colour  
Finish

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at  $\pm 10\%$ . The data values apply to an ambient temperature of  $\pm 25^\circ\text{C}$ . Specification details are subject to change without prior notification. E&OE. LXEMMEV4.9.25