#### ELECTRO-MAGNETIC GATE LOCK AEM/MINGATE/F/S

### A.12VDC Input:

Connect the Red and Black wires to 12v DC +, Connect Green and Orange wires to 12v DC -

## B. 24VDC Input:


Connect Red wire to 24v DC +, Connect Orange wire to 24v DC -, Link together Black and Green wires


#### C Contacts:

Reed switch dry contacts are rated 0.25 Amp at 30VDC/AC for safe operation, do not exceed this rating.

If you require a normally open switch, connect the wires from the system to brown wire and yellow wire of Magnet.

If you require a normally closed switch, connect the wires from the system to brown wire and blue wire of Magnet.

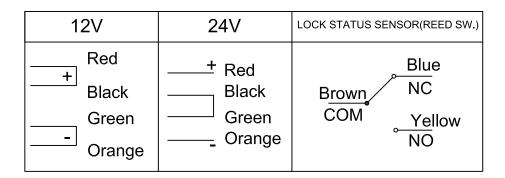

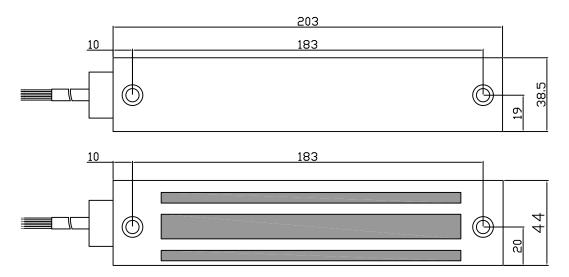

# AEM/MINGATE/F/S Mounting Installation

