

Industrial



IP65 Ingress Protection



IK08 Impact Resistance




1.5m Cable Flex



1-10V Dimmable (as Standard)

Dimensions

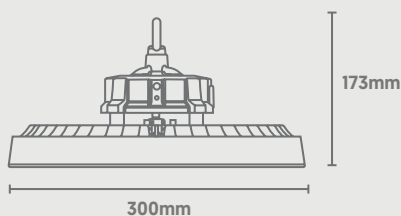

Plug & Play Optional Extras

Sensors

PRODUCT CODE: GU-BOLT-MICRO
[MICROWAVE]



PRODUCT CODE: GU-BOLT-PIR
[PIR]



PRODUCT CODE: SILVAIR-MESH-HB-SENSOR
[BLUETOOTH SENSOR]




Emergency

PRODUCT CODE: GU-BOLT-EM-KIT



Photometric Data



Glow UFO Bolt

Plug & Play High Bay

CODE: GU-BOLT-120/150/200NW/EC

QVIS®

LIGHTING & SECURITY



Power	Efficacy	Output	Kelvin
120W	170Lm/cW	20400Lm	4000K
150W	170Lm/cW	25500Lm	4000K
200W	170Lm/cW	34000Lm	4000K

Technical

Input Voltage	AC 100-240V
Colour Rendering Index	>70
Beam Spread	90°
Power Factor	>0.95
Operating Temp.	-40 to +50°C
Materials	Die-Cast & Polycarbonate
IP Rating	IP65
IK Rating	IK08
Cable Flex	1.5m
Dimmable	1-10V (as Standard)
Dimensions	300mm x 173mm
Weight	2.2kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B50 (Ta 35 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS