

KR310

Dual frequency RFID waterproof reader



KR310 is an external wiegand reader for ZKTeco access control standalone devices and control panels. With a robust design, it is easy to connect and install, and offer the possibility to control one door from both sides. The LED lights indicate allowed or denied access. It has a proximity reading range of up to 10cm (125KHz). KR310 is waterproof, and the operating temperatures can range from -10° to +70°, it is the ideal solution for outdoor installation.


Features

- IP65 waterproof
- Dual Frequency (125kHz / 13,56MHz)
- Compatible with ID, Mifare Classic, Mifare Desfire
- 34 bit

Specifications

Compatibility	ID, Mifare Classic, Mifare Desfire
Wiegand Signal	Wiegand 34 bit (EM/MF)
Power Supply	DC 6-14V / Max.70mA
Reading Distance	Up to 10cm (According to different working conditions and cards)
Read Time	<300ms
Operating Frequency	125KHz / 13.56MHz
Operating Temperature	-10 °C- 70 °C
Operating Humidity	10%-90%
Dimension(LxWxH)	77,5x42,8x16,5 mm

Dimensions (mm)

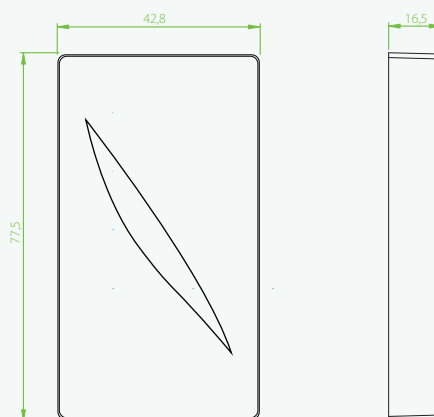

0121 790 1600



ZKTeco UK Ltd
17, Ace Business Park, Birmingham, B33 0LD

ZKTeco
UK