
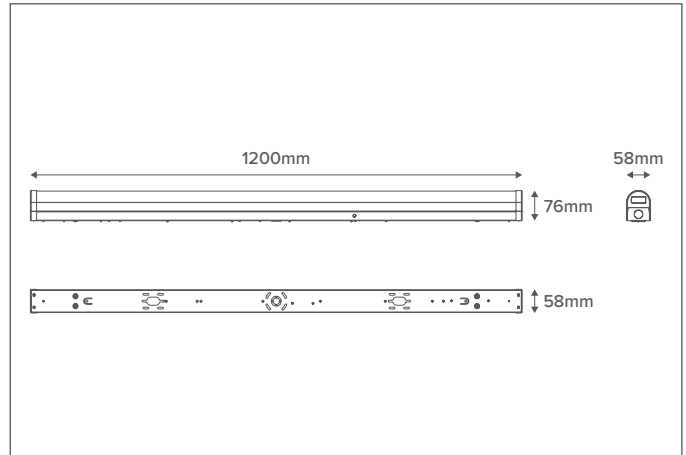


Description: 20-35W 1200mm Linear Batten Power Switchable LED Luminaire With CCT & Emergency

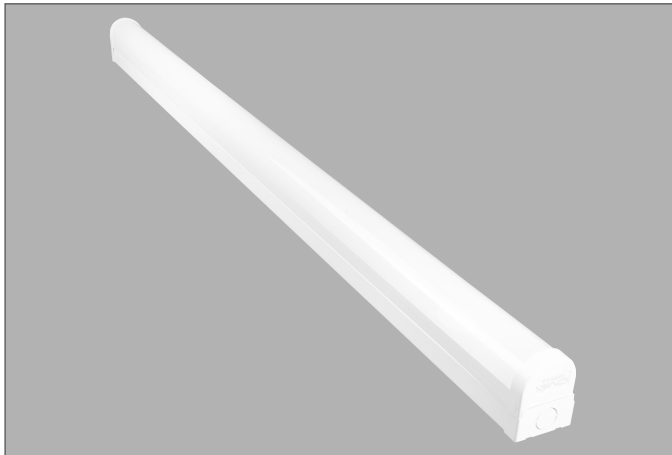

General Information

Dimensions (mm)	1200 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Aluminium; Opaque Diffuser: Polycarbonate
Bezel Colour	White (RAL9003)
Product Weight (Kg)	1.17
Ingress Protection	IP20
Impact Rating (IK)	06
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	2

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	24/29/34/39
LED Wattage Options (W)	20/25/30/35
Input Current (mA)	250
Inrush Current	60A (5ms)
Power Factor	0.9
Efficiency (%)	90
Driver Information	Integrated
Operating Temperature (°C)	0 to +45
Maximum Critical Temperature (°C)	80
Input Terminations	Push-fit Terminals
Start-up Time	<0.5s

Luminaire Output

Colour Temperature (K)	3000	4000	6000
LED Wattage	24		
Typical Luminous Flux (lm)	2200	2400	2200
Efficacy (lm/W)	91	100	91
LED Wattage	29		
Typical Luminous Flux (lm)	2750	3000	2750
Efficacy (lm/W)	94	103	94
LED Wattage	34		
Typical Luminous Flux (lm)	3300	3600	3300
Efficacy (lm/W)	97	105	97
LED Wattage	39		
Typical Luminous Flux (lm)	3850	4200	3850
Efficacy (lm/W)	98	107	98
Beam Angle (°)	120		
Colour Rendering Index (CRI)	80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No
----------	----

Emergency Backup Information

Emergency Luminous Flux (lm)	280
Installation	Can be wired as maintained or non-maintained
Battery Specification	6.4V 1500mAh LiFePO4
Minimum Duration (Hours)	3
Battery Warranty (Years)	2

Compatible Accessories

OSUSS15 - 2 x Suspension Cable for Linear Luminaires
OVEMB6415LIS - 6.4V 1500mAh LiFePo4 Battery



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

