

## PRODUCT FEATURES:

- Wirelessly Connect up to 20 RF-PRO Fire Alarms
- Plug and Play
- Large Interconnection Range



## DESCRIPTION:

The HSSA/MOD/RF-PRO is a Radiofrequency module that plugs directly into a compatible Hispec Fire Alarm. The module contains a highly refined RF antenna, thoroughly tested throughout the manufacturing process for ultimate reliability and has been extensively calibrated for optimal fire safety.


## TECHNICAL SPECIFICATION:

Radio Frequency	868MHz
Designed For Installation To:	BS5839-6:2019
Ambient Operating Temp:	0°C to 40°C
Ambient Operating Humidity:	10% to 90%
Min/Max Cable CSA:	0.75mm <sup>2</sup> to 1.5mm <sup>2</sup>
LED Indicator Function:	Solid Red = Pairing Mode, 5x Red Flash = Paired, 10x Red Flash = Factory Reset
Warranty:	5 Years
Max RF Connected Units:	20
Max RF Distance:	Open Area 80m, Enclosed Area 30m
Storage Temperature:	-10 to 50°C
Storage Humidity:	0 to 90% (non-condensing)

*\*All information is subject to change and should be verified before any critical action.*



## LINE DRAWINGS:

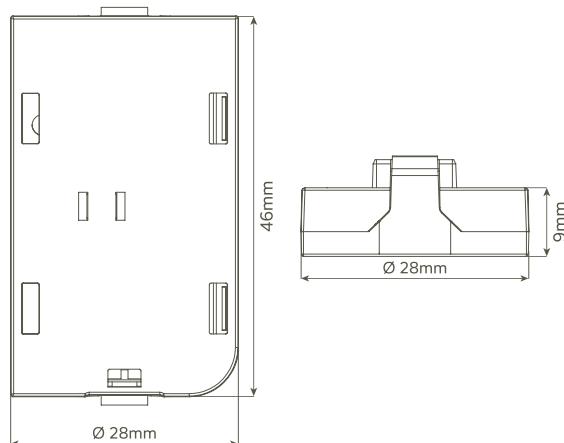

## COMPATIBILITY:

The RF-PRO module will wirelessly connect to all existing Hispec built-in RF-PRO Alarms, the module is designed to fit into the Pulse range, list of compatible products:

- HSSA/OP/10 and HSSA/OP/10H
- HSSA/HE/10 and HSSA/HE/10H
- HSSA/OH/10 and HSSA/OH/10H
- HSSA/HCO/10 and HSSA/HCO/10H

## PRODUCT CONSTRUCTION:

Plastic Housing Material: Fire Retardant ABS

Weight (Unboxed): 8g



*\*All information is subject to change and should be verified before any critical action.*

