

PRO LED Lowbay, with multi-wattage selector switch and 2CCT selector switch


Technical Specification:

Primary Materials	Aluminium heatsink, Polycarbonate lens cover
Integral Driver	Dimmable 0-10V
Luminous Efficacy	150 Lm/w
Typical UGR	-
Colour Temperature	4000K & 5000K
Colour Rendering Index	Ra 80
Ingress Protection	IP20
Beam Angle	110°
Power Factor	>0.90
Impact Resistance	IK10
Safety Class Rating	Class I
Operating Temperature	0°C to 50°C (Standard)
LED Lifetime	50,000h
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class D
Warranty*	5 Years



Dimensions:

Lowbay

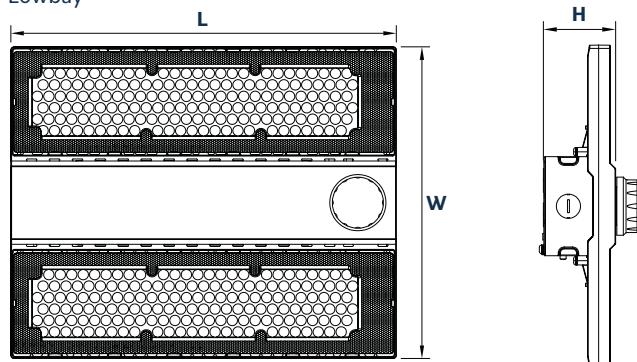

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions (L x W x H mm)	IP Rating	Ra	Weight
LXLB/100-200/P	100/150/200W	15000/22500/30000	4000K/5000K	370 x 299 x 68	IP20	>80	2.63kg

Accessories

Part No.	Description	
LXHB/MWS*	Microwave Sensor (Zhaga)	Motion and Daylight sensor, IP65, 0-10V Dim, Max. 15M mounting height, remote programmable, Zhaga
LXHB/SRC	Sensor Remote Control	Highbay/Lowbay sensor remote control programmer for use with the Luxna Pro Lowbay, Zhaga
LXLB/SMBK/P	Surface Mount Bracket	Surface mount bracket kit, for use with the Luxna Pro Lowbay

*Note - LXHB/SRC is required to programme and set-up the Sensor LXHB/MWS

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^{\circ}\text{C}$. Specification details are subject to change without prior notification. E&OE. LXLBV1.10.25