

PRO LED non-corrosive, with multi-wattage selector switch and 3CCT selector switch, IP66


Technical Specification:

Primary Materials	Polycarbonate base & diffuser, Metal gear tray
Integral Driver	Non Dimmable
Luminous Efficacy	140Lm/W
Typical UGR	<22
Colour Temperature	3000K, 4000K, 6500K Switchable
Colour Rendering Index	Ra >80
Ingress Protection	IP66
Beam Angle	120°
Power Factor	>0.90
Impact Resistance	IK10
Safety Class Rating	Class I
Operating Temperature	-20°C to 40°C (Standard), 0°C to 40°C (Emergency)
LED Lifetime	50,000h L70/B50 (Ta25°C)
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class C
Warranty*	5 Years




Dimensions:

Non-Corrosive Range

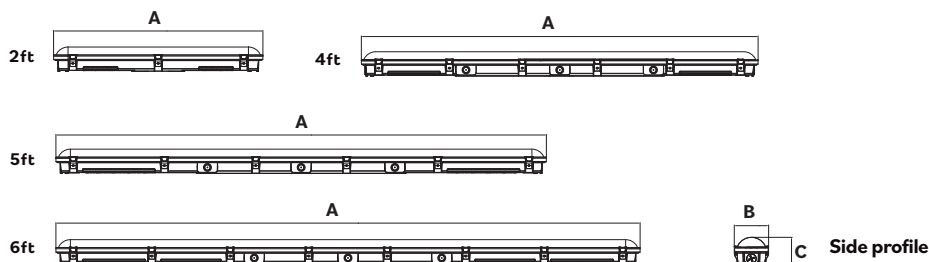

Light Distribution Curve:

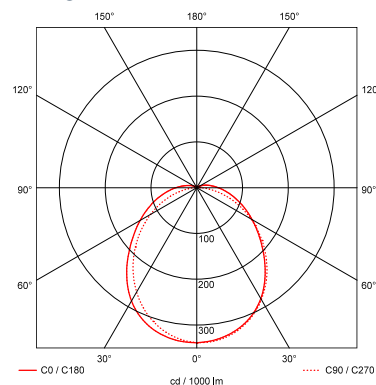


Product Range Data:

Part No.	Description	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	IP Rating	Ra	Weight
LXNCF2/9-18/P	2ft NCF	9/12/15/18W	1260/1680/2100/2520Lm	3000K/4000K/6500K	670 x 96 x 78mm	IP66	>80	0.83kg
LXNCF4/18-36/P	4ft NCF	18/24/30/36W	2520/3360/4200/5040Lm	3000K/4000K/6500K	1270 x 96 x 78mm	IP66	>80	1.43kg
LXNCF5/29-58/P	5ft NCF	29/38/48/58W	4060/5320/6720/8120Lm	3000K/4000K/6500K	1570 x 96 x 78mm	IP66	>80	1.75kg
LXNCF6/34-68/P	6ft NCF	34/45/56/68W	4760/6300/7840/9520Lm	3000K/4000K/6500K	1870 x 96 x 78mm	IP66	>80	2.17kg

Accessories:

Part No.	Plug-in Modular Accessories
LXLN/MWS	Microwave Sensor Module with corridor function
LXLN/EMM	Emergency Module and Battery, 3 hour duration, Manual-Test
LXLN/EMM/ST	Emergency Module and Battery, 3 hour duration, Manual-Test / Self-Test switchable function



LXLN/MWS



LXLN/EMM

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^\circ\text{C}$. Specification details are subject to change without prior notification. E&OE. LXPNCFV1.7.25