PRO LED Surface Linear, energy saving LED with wattage selector switch, UGR<19, 4000K, IP40


Technical Specification:

Primary Materials	Polycarbonate Diffuser, Steel Base
Integral Driver	Non Dimmable
Luminous Efficacy	135Lm/W
Typical UGR	<19
Colour Temperature	4000K
Colour Rendering Index	Ra >80
Ingress Protection	IP40
Beam Angle	90°
Power Factor	>0.9
Impact Resistance	IK08
Safety Class Rating	Class I
Operating Temperature	-20°C to 40°C (Standard), 0°C to 40°C (Emergency)
LED Lifetime	50,000h L70/B50(Ta25°C)
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class C
Warranty*	5 Years

135 LUMEN PER WATT | IP40 | IK08 | RATED LIFE 50,000 HRS | 5 YEAR WARRANTY | C | PLUG-IN MODULAR




Light Distribution Curve:

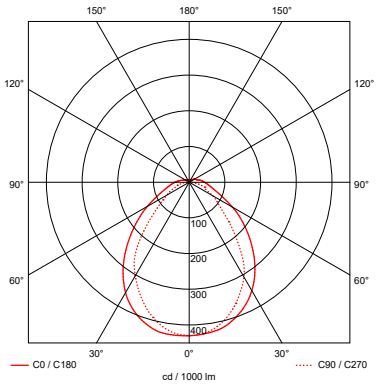

Dimensions:

Surface Linear

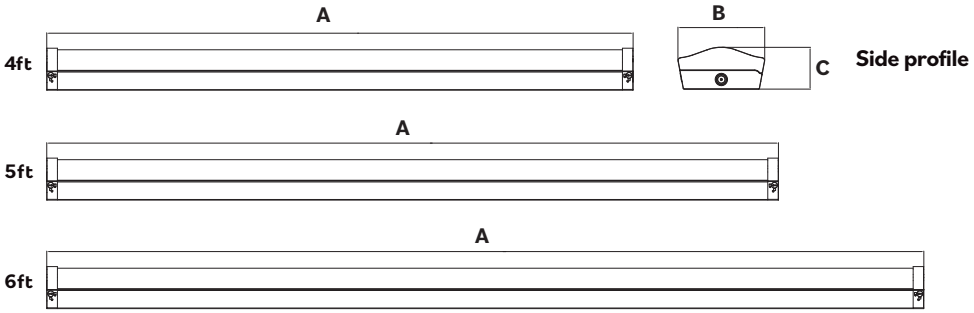

Product Range Data:


Part No.	Description	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	IP Rating	Ra	Weight
LXSL4/12-24/4K/P	4ft Surface Linear	12/16/20/24W	1620/2160/2700/3240Lm	4000K	1215x180x87mm	IP40	>80	2.5kg
LXSL5/15-30/4K/P	5ft Surface Linear	15/20/24/30W	2025/2700/3240/4050Lm	4000K	1515 x 180 x 87mm	IP40	>80	3.31kg
LXSL6/20-38/4K/P	6ft Surface Linear	20/26/32/38W	2700/3510/4320/5130Lm	4000K	1815x180x87mm	IP40	>80	4kg

Accessories:


Part No.	Description
LXLN/MWS	Microwave Sensor Module with corridor function
LXLN/MWS/RC	Microwave Sensor Module with Remote Functionality
LXLN/MWS/RCP	Microwave Sensor Remote Control Programmer - For use with (LXLN/MWS/RC)
LXLN/EMM	Emergency Module and Battery, 3 hour duration, Manual-Test
LXLN/EMM/ST	Emergency Module and Battery, 3 hour duration, Manual-Test / Self-Test switchable function
LXSL/SCK	Suspension Cable Kit - Maximum length 1500mm



LXLN/EMM LXLN/EMM/ST



LXLN/MWS
LXLN/MWS/RC



LXLN/MWS/RCP

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXPSLV1.6.26

E: sales@luxna.co.uk W: luxna-lighting.com
A: Unit B, Foxbridge Way, Normanton, West Yorkshire, WF6 1TN