

PRO LED Surface Linear, energy saving LED with 15-30W wattage selector switch, UGR<19, 4000K, IP40


### Technical Specification:

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Primary Materials              | Polycarbonate Diffuser, Steel Base                |
| Integral Driver                | Non Dimmable                                      |
| Luminous Efficacy              | 135Lm/W                                           |
| Typical UGR                    | <19                                               |
| Colour Temperature             | 4000K                                             |
| Colour Rendering Index         | Ra >80                                            |
| Ingress Protection             | IP40                                              |
| Beam Angle                     | 90°                                               |
| Power Factor                   | >0.9                                              |
| Impact Resistance              | IK08                                              |
| Safety Class Rating            | Class I                                           |
| Operating Temperature          | -20°C to 40°C (Standard), 0°C to 40°C (Emergency) |
| LED Lifetime                   | 50,000h L70/B50 (Ta25°C)                          |
| Input Voltage & Frequency      | AC220-240V 50/60Hz                                |
| Light Source Energy Efficiency | Class C                                           |
| Warranty*                      | 5 Years                                           |




### Dimensions:

#### Surface Linear

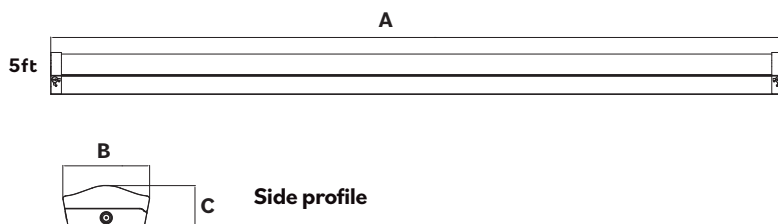

### Light Distribution Curve:

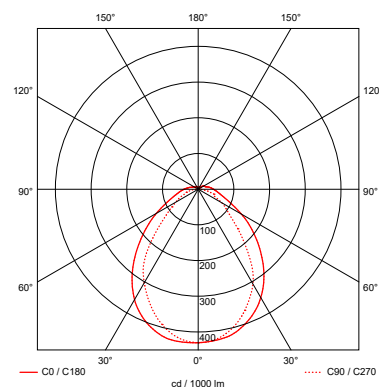


### Product Range Data:

| Part No.         | Description        | Power        | Lumen Output          | Colour Temperature | Dimensions A x B x C | IP Rating | Ra  | Weight |
|------------------|--------------------|--------------|-----------------------|--------------------|----------------------|-----------|-----|--------|
| LXSL5/15-30/4K/P | 5ft Surface Linear | 15/20/24/30W | 2025/2700/3240/4050Lm | 4000K              | 1515 x 180 x 87mm    | IP40      | >80 | 3.31kg |

### Accessories:

| Part No.    | Description                                                                                |
|-------------|--------------------------------------------------------------------------------------------|
| LXLN/MWS    | Microwave Sensor Module with corridor function                                             |
| LXLN/EMM    | Emergency Module and Battery, 3 hour duration, Manual-Test                                 |
| LXLN/EMM/ST | Emergency Module and Battery, 3 hour duration, Manual-Test / Self-Test switchable function |



LXLN/MWS



LXLN/EMM

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at  $\pm 10\%$ . The data values apply to an ambient temperature of  $+25^\circ\text{C}$ . Specification details are subject to change without prior notification. E&OE. LXPSLV1.7.25