

PRO LED Round bulkhead, energy saving LED with 11-18W wattage selector switch and 3CCT selector switch, IP65, White


Technical Specification:

Primary Materials	Polycarbonate base & diffuser, Metal gear tray
Integral Driver	Non Dimmable
Luminous Efficacy	120 Lm/W
Typical UGR	<22
Colour Temperature	3000K, 4000K, 6500K Switchable
Colour Rendering Index	Ra >80
Ingress Protection	IP65
Fire Rating	N/A
Beam Angle	120°
Power factor	>0.7
Impact Resistance	IK10
Safety Class rating	Class II
Operating Temperature	-10°C to +40°C (Standard), 0°C to +40°C (Emergency)
LED Lifetime	50,000h L70/B50 (Ta25°C)
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class C
Warranty*	5 Years




Dimensions:

Round Bulkhead



4-point side conduit entry and
Besa box mountings

Light Distribution Curve:

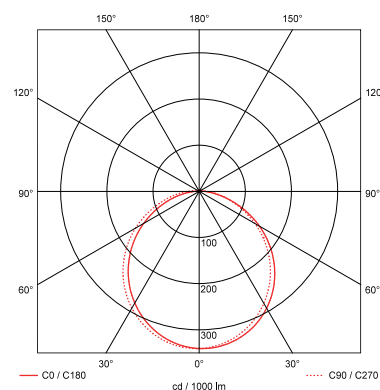

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B	IP Rating	Class Rating	Ra	Weight
LXBHR/11-18/P	11/15/18W	1320/1800/2160Lm	3000K/4000K/6500K	325 x 90mm	IP65	Class II	>80	0.85kg

Accessories:

Part No.	Plug-in Modular Accessories
LXBH/MWS	Microwave Sensor Module with corridor function
LXBH/EMM	Emergency Module and Battery, 3 hour duration, Manual-Test
LXBH/EMM/ST	Emergency Module and Battery, 3 hour duration, Manual-Test / Self-Test switchable function



LXBH/MWS



LXBH/EMM

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^\circ\text{C}$. Specification details are subject to change without prior notification. E&OE. LXPBHRV1.25

Part No.	Bezel Trim Accessories
LXBHR/MBB/P	Black Round Bezel Trim, Clip on 325mm
LXBHR/PCB/P	Polished Chrome Round Bezel Trim, Clip on, 325mm
LXBHR/MBE/P	Matt Black Round Eyelid Bezel, Clip on, 325mm
LXBHR/MBG/P	Black Round Grille Bezel, Clip on, 325mm



LXBHR/MBB/P



LXBHR/PCB/P



LXBHR/MBE/P



LXBHR/MBG/P

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^{\circ}\text{C}$. Specification details are subject to change without prior notification. E&OE. LXPBHRV1.25