

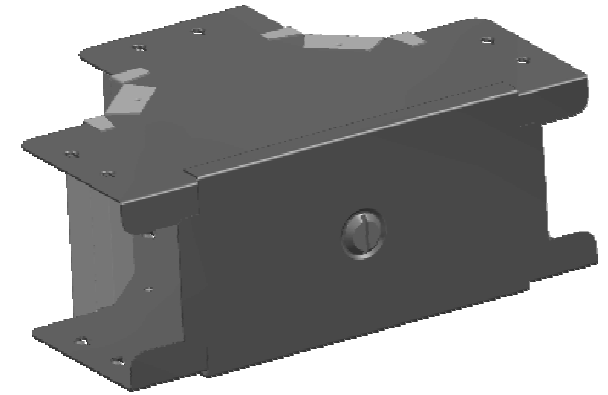


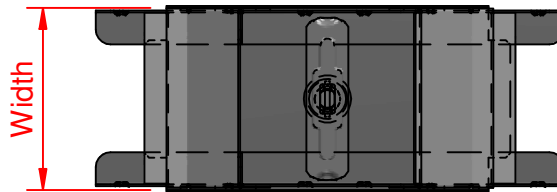


QuickFix

Size	Width	Height
GOT22	50.8	50.8
GOT32	76.2	50.8
GOT33	76.2	76.2
GOT42	101.6	50.8
GOT43	101.6	76.2
GOT44	101.6	101.6
GOT62	152.4	50.8
GOT63	152.4	76.2
GOT64	152.4	101.6
GOT66	152.4	152.4
GOT82	203.2	50.8
GOT83	203.2	76.2
GOT84	203.2	101.6
GOT88	203.2	203.2
GOT92	228.6	50.8
GOT93	228.6	76.2
GOT94	228.6	101.6
GOT96	228.6	152.4
GOT99	228.6	228.6

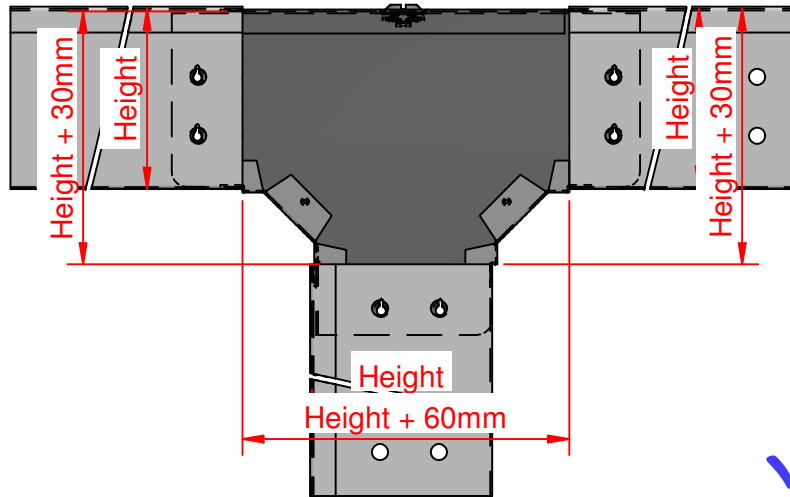

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ **IP4X compliant** as standard
- ✓ **Completes the range** of fast fitting and innovative Cable Management Solutions

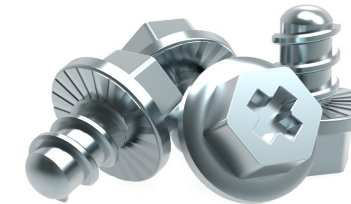

In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

Cable Trunking & Ducting Standard BS EN 50085-1 & BS EN 50085-2-1		Material Standard BS EN 10346 (Pre Galv)		Quality Recognition	
Unitrunk Head Office: 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100 info@unitrunk.co.uk unitrunk.co.uk unitrunk.ie		Lid Fixing	Torque Value		
		Retained Toggle	3 N m		
Data Sheet Reference		Revision			
Gusset Tee Outside Lid		2.01			



UNITRUNK