

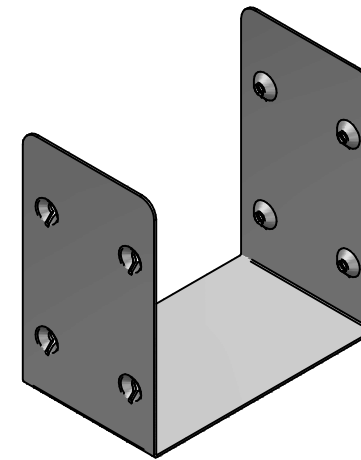


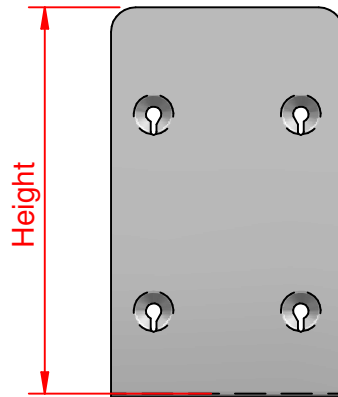


# QuickFix

Size	Width	Height
TC22	49.8	49.8
TC32	75.2	49.8
TC33	75.2	75.2
TC42	100.6	49.8
TC43	100.6	75.2
TC44	100.6	100.6
TC62	151.4	49.8
TC63	151.4	75.2
TC64	151.4	100.6
TC66	151.4	151.4
TC82	202.2	49.8
TC83	202.2	75.2
TC84	202.2	100.6
TC88	202.2	202.2
TC92	227.6	49.8
TC93	227.6	75.2
TC94	227.6	100.6
TC96	227.6	151.4
TC99	227.6	227.6

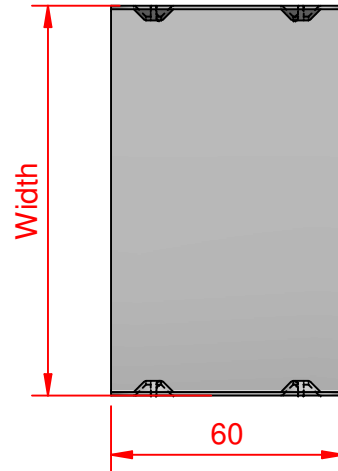

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ **IP4X compliant** as standard
- ✓ **Completes the range** of fast fitting and innovative Cable Management Solutions

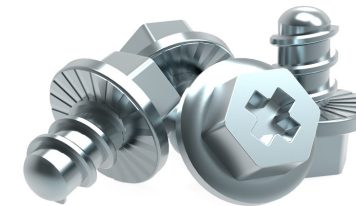

In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

<b>Cable Trunking &amp; Ducting Standard</b> BS EN 50085-1 & BS EN 50085-2-1	<b>Material Standard</b> BS EN 10346 (Pre Galv)		<b>Quality Recognition</b>	
	<b>Unitrunk Head Office:</b> 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100   info@unitrunk.co.uk <b>unitrunk.co.uk   unitrunk.ie</b>	<b>Lid Fixing</b> Retained Toggle	<b>Torque Value</b> 3 N m	
	<b>Data Sheet Reference</b> Trunking Coupler	<b>Revision</b> 2.01		



# UNITRUNK