


Backlit LED Panel, 50W, TP(a), 1200x600


Technical Specification:

Primary Materials	Aluminium frame, PS Diffuser
Remote Driver	Non Dimmable
Luminous Efficacy	120Lm/W
Typical UGR	<22
Colour Temperature	4000K & 6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP54 (IP20 Driver)
Fire Rating	TP(a)
Beam Angle	120°
Power Factor	>90
Impact Resistance	IK02
Safety Class Rating	Class II
Operating Temperature	-10°C to 40°C
LED Lifetime	50,000h L70/B50 (Ta25°C)
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class E
Warranty*	5 Years

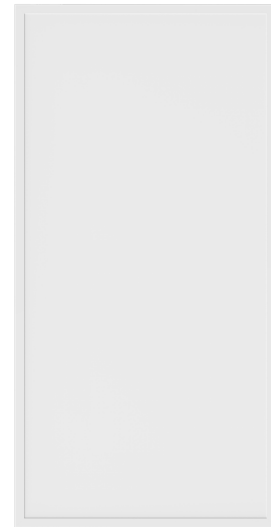


Dimensions:

Panel:

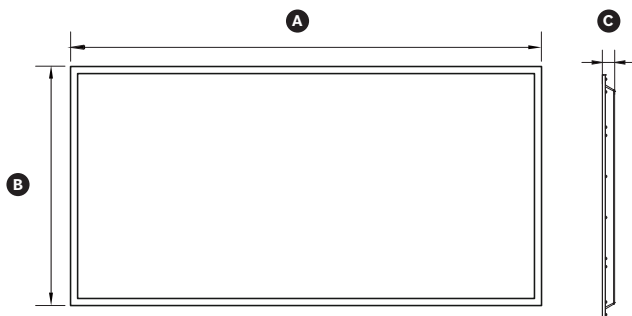

Light Distribution Curve:

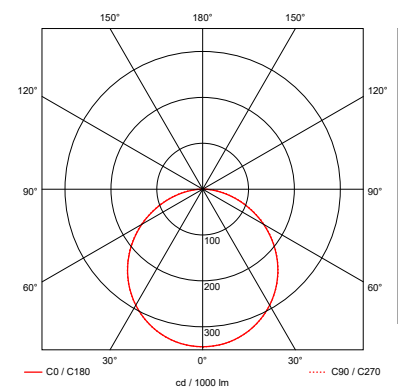

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	TP Fire Rating	IP Rating	Ra	Weight
LXPANB126/50/4K	50W	6000Lm	4000K	1195 x 595 x 28mm	TP(a)	IP54	>80	3.3kg
LXPANB126/50/6K	50W	6000Lm	6000K	1195 x 595 x 28mm	TP(a)	IP54	>80	3.3kg

Accessories:

Part No.	Description
LXERP/55/EM3	3Hr Emergency Remote Pack LiFePO4 240/10-55Vdc
LXERP/55/EM3/S	3Hr Emergency Remote Pack LiFePO4 240/10-55Vdc Self Test
LXPANB126/M/DD	Panel Driver 34-60W 800-2000MA 0-10V / PUSH / DALI2.0 Dimmable
LXPANB126/SMBK	Surface Mount Box Kit
LXPANB/RFC/K2	Panel Recessed Fixing Clips - For Use With LXPANB12 & LXPANB66/IP65
LXPANB/SCK	Panel Suspension Cable Kit - For Use With LXPANB66 PRO Range

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^\circ\text{C}$. Specification details are subject to change without prior notification. E&OE: LXPAN126.08.26