




Main Product Features

- 160W/M²
- Ideal for use in any room
- 3.8mm thick
- Adhesive backed
- 2.5m cold lead
- FEP cable jacket
- Suitable for tile & stone
- Available from 1m² to 15m²

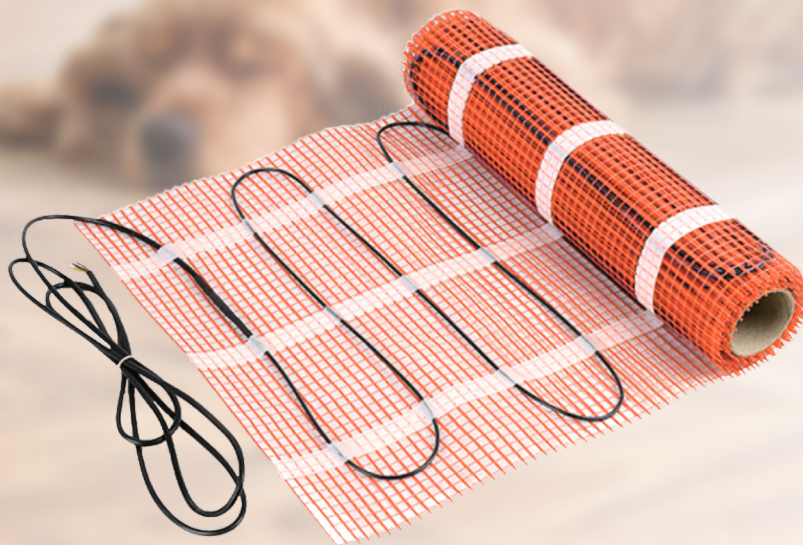

PART NO.	HEATED AREA M ²	MAT DIMENSIONS M*M
OSUFH1SQ	1.0m ²	0.5 x 2m
OSUFH1.5SQ	1.5m ²	0.5 x 3m
OSUFH2SQ	2.0m ²	0.5 x 4m
OSUFH2.5SQ	2.5m ²	0.5 x 5m
OSUFH3SQ	3.0m ²	0.5 x 6m
OSUFH4SQ	4.0m ²	0.5 x 8m
OSUFH5SQ	5.0m ²	0.5 x 10m

PART NO.	HEATED AREA M ²	MAT DIMENSIONS M*M
OSUFH6SQ	6.0m ²	0.5 x 12m
OSUFH7SQ	7.0m ²	0.5 x 14m
OSUFH8SQ	8.0m ²	0.5 x 16m
OSUFH9SQ	9.0m ²	0.5 x 18m
OSUFH10SQ	10.0m ²	0.5 x 20m
OSUFH12SQ	12.0m ²	0.5 x 24m
OSUFH15SQ	15.0m ²	0.5 x 30m

TECHNICAL SPECIFICATION	
Voltage	230V~50Hz
Conductor	Twin conductor
Output power	160w/m ²
Earthing Class	Class 1

Accessories

PART NO.	DESCRIPTION
OSUFHSTAT	LCD Thermostat for Underfloor Heating, Floor Probe Included
OSUFH-PROBE	2.5m Floor Probe
OSUFH-CONDUIT	1.5m Conduit