


LED Panel 1200

- Energy savings up to 60% when replacing T8 fluorescent luminaires
- Suitable for 25mm and 15mm T-bar ceilings
- Frame colour: White
- Standard non dimmable driver included
- Colour temperature: 4000K and 6000K options
- Colour rendering index: >80
- Rated Life (L70): 50,000 hours
- Options available:
 - Dimmable driver 1-10v & DALI: **LXLPF2-30D-48**
 - Dimmable driver Touch (Push) and DALI: **LXLPF2-1400-DTD**
 - Emergency 3hr remote pack: **LXLPF2-60-EM3**
 - Surface mounting frame: **LXPAN123SMB, LXPAN126SMB**
 - Wire suspension kit: **LXPAN1263SCK**
 - Recessed fixing clips x4 pack: **LXPAN66RFC** (x2 packs required)

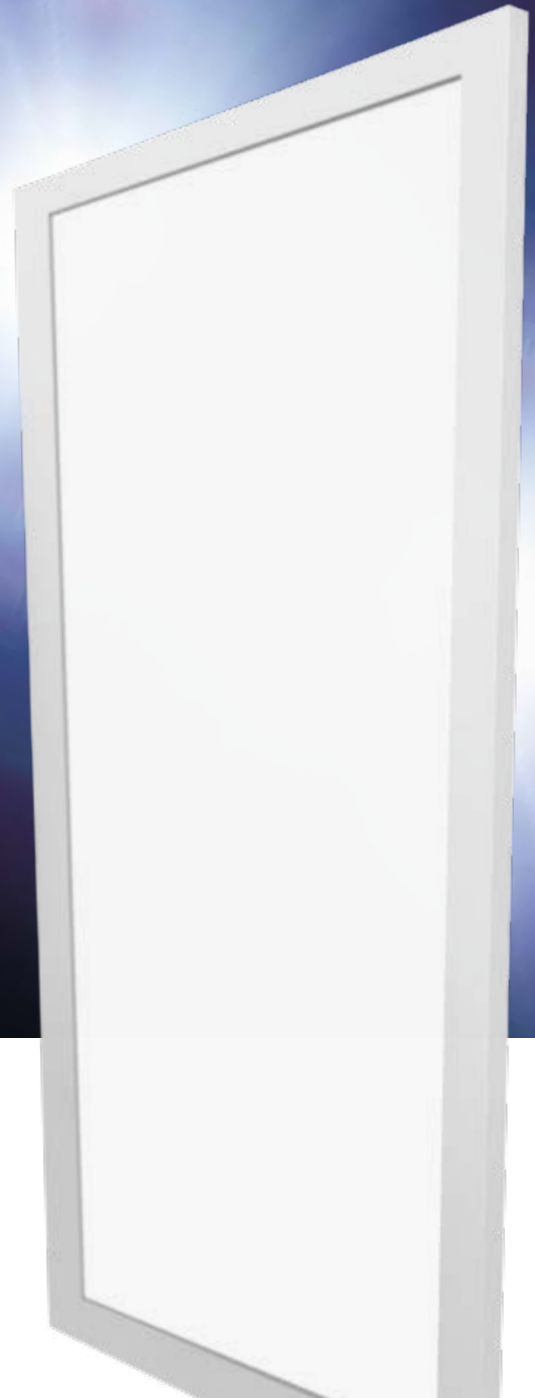

5 YEAR
WARRANTY

LED

IP20

SAVE UP TO **60%**
ON ENERGY

L1A BUILDING REGULATIONS COMPLIANT

L2B BUILDING REGULATIONS COMPLIANT

Part No.	Wattage	Measurement L x W x H	Lumen Output	IP Rating	Colour Temperature
LXPAN60LED123NW2	60W	1195 x 295 x 10.5mm	1500Lm	IP20	4000K
LXPAN60LED123CW2	60W	1195 x 295 x 10.5mm	1500Lm	IP20	6000K
LXPAN60LED1263NW2	60W	1195 x 595 x 10.5mm	1500Lm	IP20	4000K
LXPAN60LED1263CW2	60W	1195 x 595 x 10.5mm	1500Lm	IP20	6000K



Email sales@luxna.co.uk



Web luxna-lighting.com