

Technical Data Sheet

Product Code

MTD3

Product Description

Apollo - Apollo 3 Compartment Perimeter Trunking

Product Dimensions

170 x 50mm Profile

3 Metre Length



Applicable Standards:

BS6701 (Telecommunications equipment and cabling)
ISO/IEC 11801 (ED2.0 Amd 2) (Generic cabling for customers premises)
Cenlec (BSEN50173 Part 1/2, BSEN50174-2) (Generic cabling and installation)
BS4678 Pt 4 (Cable Trunking)
BS7671 (IEE Regulations) (Wiring Regulations)

Product Specification:

Description: 3 compartment perimeter trunking for Dado mounting

Material Compliance: RoHS & WEEE Compliant

Manufactured: Extruded from Pellets

Material Specification:(if applicable)

Description: A Calcium/Zinc stabilised, medium/high impact uPVC

PROPERTY	Standard	UNITS	VALUE
Specific Gravity	BS2782 620A	g/cc	1.50
Vicat Softening Point	BS2782 (B50) 1990 120B	°C	78
Tensile Strength @ Yield	BS2782 320A-F	MPa	40

The above are typical test results and do not constitute any part of a specification

Colours:

MTD3 - Pure White
MTD3G - Grey
MTD3LO - Light Oak
MTD3CH - Charcoal

Additional Finishes:

MTD3AM - Anti-Microbial

Base:


Pre Punched for wall mounting at 200mm intervals

Screening:

MTAS - Slide in steel screening divider top and bottom
MTD105 - Slide in uPVC divider top and bottom

Technical Data Sheet

Dimensions and Cable Capacities

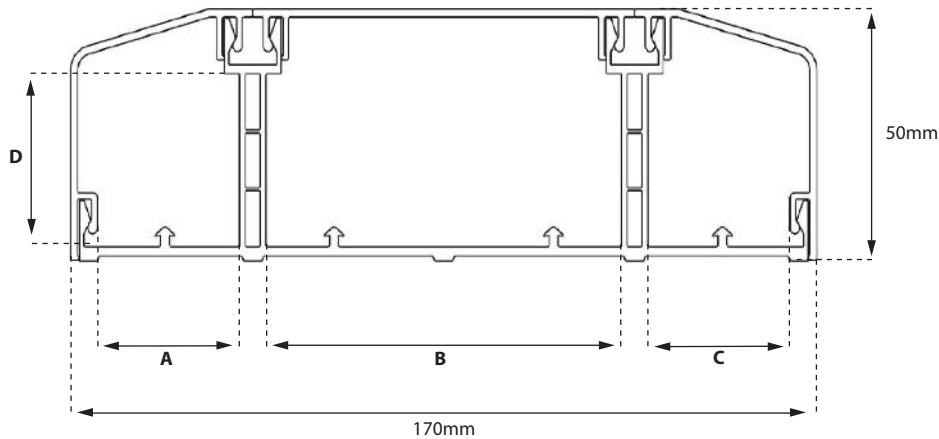

Compartment width in (mm)

A	B	C
32.4	81	32.4

Internal Height (mm)

D
36

Data

DATA CABLE DIAMETER (mm)	NOMINAL CSA (mm ²)	COMPARTMENT A 1470mm ²	COMPARTMENT B			COMPARTMENT C 1470mm ²
			3590mm ²	3590mm ² and 25mm back box (1891mm ²)	3590mm ² and 35mm back box (1170mm ²)	
		45% Fill (661.5mm ²)	45% Fill (1615.5mm ²)	45% Fill (851mm ²)	45% Fill (526mm ²)	45% Fill (661.5mm ²)
5	19.6	33	82	43	26	33
5.5	23.8	27	67	35	22	27
6	28.3	23	57	30	18	23
6.5	33.2	19	48	25	15	19
7	38.5	17	41	22	13	17

Power

POWER CABLE CONDUCTOR CSA(mm ²)	CABLE FACTOR	COMPARTMENT A 1470mm ²	COMPARTMENT B			COMPARTMENT C 1040mm ²
			3590mm ²	3590mm ² and 25mm back box (1891mm ²)	3590mm ² and 35mm back box (1170mm ²)	
		45% Fill (661.5mm ²)	45% Fill (1615.5mm ²)	45% Fill (851mm ²)	45% Fill (526mm ²)	45% Fill (661.5mm ²)
1.5	8.6	76	187	98	61	76
2.5	12.6	51	126	67	41	51
4	16.6	39	97	51	31	39
6	21.2	31	76	40	25	31