

Description: HPSE 400W/E40/HO

Performance Data


Rated Light Output (Lumens @ 100 hours)	53000
Lamp Lumens per Watt (100hrs)	133
Rated Life (Hrs @ 10Hr./Start)	28000+
Correlated Colour Temperature (K)	2000
Chromaticity (CIE - X Y)	525,425
Colour Rendering Index (CRI) or (Ra)	20
Typical Warm Up Time (Minutes)	3
Typical Hot Restart Time (Minutes)	1
Energy Rating (ErP)	A+ 440 kWh/1000h

Physical Data


Base Designation	E40
Bulb Designation	E120
Bulb Diameter (mm)	122
Max. Overall Length (mm)	282
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	5
Mercury Content (mg)	12.5

Lamp Electrical Data

Nominal Lamp Wattage (W)	400
Lamp Operating Voltage (V)	100
Lamp Operating Current (A)	4.5
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3800-4500
Min. Pulse Width (Microseconds)	1
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

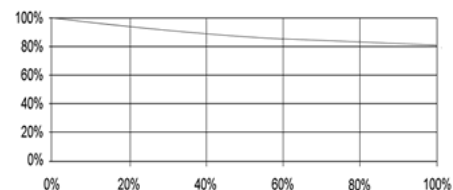


Lumen Maintenance (Light Output vs. Rated Life)

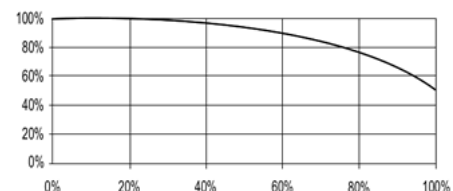

Lamp Mortality (Survivors vs. Rated Life)

Revision: 15-02-2017

See page 2 for product notes





Product Code: 00404

Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.