


## TKS 32

Membrane cable entrie with strain relief

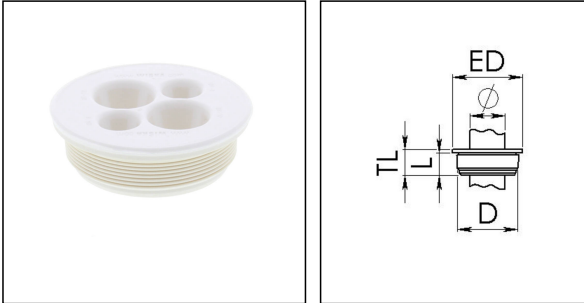

Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

<b>Material</b>	Polypropylene
<b>Material membrane</b>	TPE
<b>Temp. range min</b>	-30 °C
<b>Temp. range max</b>	80 °C
<b>Glow wire test</b>	960 °C
<b>Protection class</b>	IP66
<b>Ø Connection thread D</b>	32
<b>Ø cable diameter min</b>	4 mm
<b>Ø cable diameter max</b>	12 mm
<b>External diameter ED</b>	37 mm
<b>Total length TL</b>	12 mm
<b>Ø Drilling</b>	32 mm
<b>Product Color</b>	RAL 9001
<b>Order no. RAL 9001</b>	10108617
<b>Type</b>	TKS 32
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000451

Remarks:

- Flammability: UL94-V0
- for cable entries 2 x 7-12mm + 2 x 4-8mm

14.08.2018

Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk



Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk