


<b>Technical Data Sheet:</b>	<b>DS016/0114</b>
<b>Product Description</b>	Galvanised steel helically wound flexible conduit with smooth, oil resistant, black PVC coating.
<b>Product Range</b>	<b>LTP - Metallic Conduits</b>

Roman Way, Coleshill  
Birmingham  
B46 1HG  
Tel: 00 44 (0)1675 466900  
Website: www.flexicon.uk.com



LTP Conduit

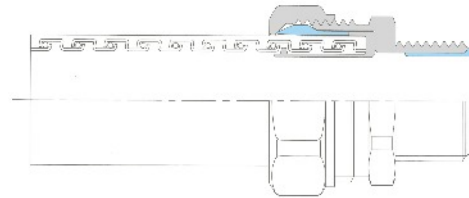

LTP Conduit with C Type fitting

**Material;**  
Galvanised Steel, helically wound flexible conduit with smooth, oil resistant, black PVC coating. Manufactured to American (UL360) sizes.

**Colour:**  
Black

Note: Grey or orange available on request

**Fire Performance:**

Self Extinguishing

**IP Rating:**

• IP66, IP67, IP68 (5 Bar), IP69K

**Applications:**

Typically used for outdoor applications where liquid tight is a requirement.

**Compression Strength (20mm size):**  
400kg/100mm

**Pull-off (Tensile) strength (20mm size):**  
130kg

**Temperature Performance:**

-20°C to +105°C

Nominal Size	US Trade Size (Inches)	Part No	Dimensions			
			Reel Length (M)	OD (mm)	ID (mm)	Min Bend radius R (mm)
10	1/4"	LTP10*	50	11.8	7.0	35
12	5/16"	LTP12*	25, 50	14.2	10.0	40
16	3/8"	LTP16	10,25, 50	17.8	12.6	45
20	1/2"	LTP20	10,25, 50	21.1	16.0	65
25	3/4"	LTP25	10,25,50	26.4	21.0	100
32	1"	LTP32	10,25	33.1	26.5	135
40	1 1/4"	LTP40	10,25	41.8	35.4	175
50	1 1/2"	LTP50*	10,25	47.9	40.4	230
63	2"	LTP63*	10,25	59.7	51.6	280

\* double interlock section

**Compliance, Approvals & Accreditation;**



EN 61386 Classification Available on request  
Vibration and Shock resistant to EN 61373 Cat 2  
Lloyds Register of shipping Type Approved  
Russian Fire Safety Certificate No. 000166

**Typical Applications;**





Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; <b>Colin Legg - Marketing Manager</b>	Approved by; <b>Ian Gibson - Technical Director</b>	Date; <b>January 2014</b>	Page Number; <b>Page 1 of 2</b>
------------------------------------------------------	--------------------------------------------------------	------------------------------	------------------------------------

<b>Technical Data Sheet:</b>	<b>DS016/0114</b>
<b>Product Description</b>	Galvanised steel helically wound flexible conduit with smooth, oil resistant, black PVC coating.
<b>Product Range</b>	<b>LTP - Metallic Conduits</b>

**FLEXICON**  
 FLEXIBLE CONDUIT SOLUTIONS  
 Roman Way, Coleshill  
 Birmingham  
 B46 1HG  
 Tel: 00 44 (0)1675 466900  
 Website: www.flexicon.uk.com

Technical Properties	
Good Flexibility	Yes
High compression strength – kg /100mm for LTP20	400 kg
Tensile strength kg (LTP20)	130 kg
Temperature Range	-20° to + 105 ° C
Oil resistant	Yes
IP Rating – with Flexicon LTP fittings	<b>IP66, IP67, IP68(5 bar), IP69K</b>
Self extinguishing to EN 61386-1 (BSI Report No. 2381/7847798)	Yes
Conforms to EN 61386-2-3 (tested by BSI)	Yes
Lloyds register of shipping type approval	Yes
Vibration and Shock resistant to EN 61373 Cat 2 (TUV Report 75908286)	Yes
UV Resistant (Black & Grey) (UL Report No. 13CA50836)	Yes
Russian Fire Safety Certificate No. 000166	Yes

<b><u>Other Variants Available:</u></b>	
<p><b>LTPUL</b></p> <p><b>Construction:</b> Galvanised steel, helically wound, flexible steel conduit including copper bonding strip (up to 32mm) with smooth pvc cover. Colour black.</p> <p><b>Typical Applications:</b> As for LTP but where UL listing or CSA approval is required.</p> 	<p><b>LTPHC</b></p> <p><b>Construction:</b> Galvanised steel, helically wound, flexible conduit with smooth thermoplastic rubber cover. Colour black.</p> <p><b>Typical Applications:</b> Machine tools or outdoor installations where low or high temperature rating is required.</p> 
Created by; <b>Colin Legg - Marketing Manager</b>	Approved by; <b>Ian Gibson - Technical Director</b>
Date; <b>January 2014</b>	Page Number; <b>Page 2 of 2</b>