


Technical Data Sheet:	DS702-2
Product Description	90 degree elbow Nylon Metric thread conduit fitting
Product Range	Flexilok - Nylon fitting (Metric Thread)

FLEXICON
 FLEXIBLE CONDUIT SOLUTIONS
 Roman Way, Coleshill
 Birmingham
 B46 1HG, United Kingdom
 Tel: 00 44 (0)1675 466900
 Website: www.flexicon.uk.com

MADE IN THE UK

bsi
 UKAS
 FM58347

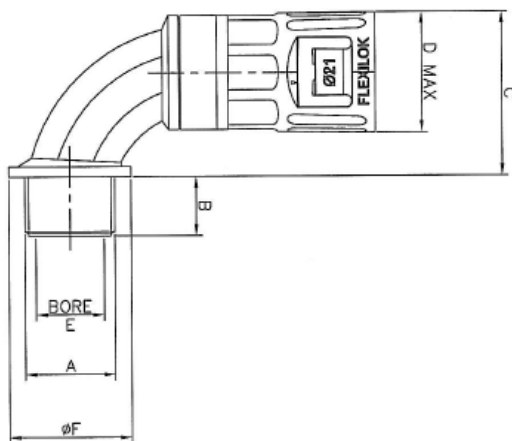

Material:
Nylon PA66

Colour:
Black & Grey (RAL7031) as standard.
White available on request

Fire Performance:
Extra Low Fire Hazard - Halogen & Phosphorous Free
 For full details of fire performance details of PA66 fittings see data sheet reference DS601

IP Rating:
IP66

Applications:
Suitable for knockouts or threaded entries.

Features:

- 1 Part
- Slim design
- UV Resistant - Black
- Fast Fit
- Suitable for fine or coarse pitch conduits
- Can be removed using a screwdriver if required
- Metric version supplied complete with Locknut

Temperature Performance:
-40°C to +120°C

Conduit Size	Part No.	Metric Thread	Dimension (mm)				
			A	B	C	D	E
16	FLK16-M16-90#	M16 X 1.5	11.5	33	21	10.5	22
16	FLK16-M20-90#	M20 X 1.5	13.0	33	21	14.0	27
20	FLK20-M20-90#	M20 X 1.5	13.0	35	25	14.0	27
21	FLK21-M20-90#	M20 X 1.5	13.0	36	26	14.0	27
25	FLK25-M25-90#	M25 X 1.5	15.0	43	30	19.0	33
28	FLK28-M25-90#	M25 X 1.5	15.0	45	34	19.0	33
32	FLK32-M32-90#	M32 X 1.5	16.0	52	39	24.5	40
34	FLK34-M32-90#	M32 X 1.5	16.0	53	41	24.5	40


NB: # add B for black and G for Grey

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

Typical Applications;

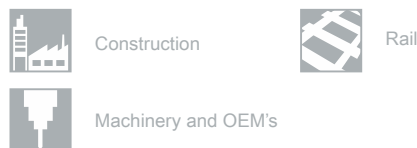

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Sarah Lee - Marketing Assistant	Approved by; Ian Gibson - Technical Director	Date; August 2017	Page Number; Page 1 of 1
---	--	-----------------------------	------------------------------------