# **PHILIPS** Lighting



# **MASTER PL-S 2 Pin**

# MASTER PL-S 9W/840/2P 1CT/5X10CC

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

### Warnings and Safety

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- $\cdot$  Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


eneral Information		Luminous flux (rated) (nom.)	583 lm
Cap base	G23 [ G23]	Colour designation	Cool White (CW)
ife to 10% failures (nom.)	6500 h	Correlated Colour Temperature (Nom)	4000 K
ife to 50% failures (nom.)	10000 h	Luminous efficacy (rated) (nom.)	67 lm/W
SF 2000 h Rated	99 %	Colour rendering index (nom.)	82
LSF 4000 h Rated	98 %	LLMF 2000 h Rated	94 %
SF 6000 h Rated	95 %	LLMF 4000 h Rated	91 %
LSF 8000 h Rated	86 %	LLMF 6000 h Rated	89 %
		LLMF 8000 h Rated	86 %
Light Technical			
Colour Code	840 [ CCT of 4,000 K]	Operating and Electrical	
uminous flux (nom.)	600 lm	Power (Rated) (Nom)	8.7 W

# **MASTER PL-S 2 Pin**

Lamp current (nom.)	0.170 A
Temperature	
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-base information	2P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	11 kWh

Product Data		
Full product code	871150026087170	
Order product name	MASTER PL-S 9W/840/2P 1CT/5X10CC	
EAN/UPC – product	8711500260871	
Order code	26087170	
Local order code	9PLS8402PINB	
SAP numerator – quantity per pack	1	
Numerator – packs per outer box	50	
SAP material	927936084011	
SAP net weight (piece)	32.000 g	
ILCOS code	FSD-9/40/1B-I-G23	

## Dimensional drawing



 Product
 D (max)
 D (max)
 A (max)
 B (max)
 C (max)

 MASTER PL-S 9W/840/2P 1CT
 28 mm
 129 mm
 145 mm
 167 mm

 SX10CC
 28 mm
 13 mm
 129 mm
 145 mm
 167 mm

PL-S 9W/840/2P LM

### Photometric data


#### Lightcolour /840


Lightcolour /840

# **MASTER PL-S 2 Pin**

Lifetime

(%) > 100

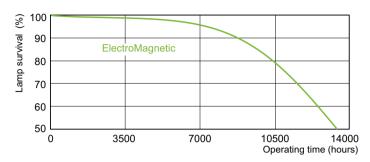



LDLE\_PLS2PLM\_0001-Life expectancy diagram

LDLM\_PLS2PLM\_0001-Lumen maintenance diagram

LDLE\_PLS2PLM\_0002-Life expectancy diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, April 1 - data subject to change