



# MASTER TL5 High Output

## MASTER TL5 HO 49W/830 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Luminous efficacy (rated) (nom.)	
Cap base	G5 [ G5]		89 lm/W
Life to 50% failures preheat (nom.)	30000 h	Color rendering index (max.)	85
Features	na [ Not Applicable]	Colour-rendering index (min.)	80
System description	High Output (HO)	Colour rendering index (nom.)	82
LSF preheat 2,000 hours rated	99 %	LLMF 2000 h Rated	96 %
LSF preheat 4,000 hours rated	99 %	LLMF 4000 h Rated	95 %
LSF preheat 6,000 hours rated	99 %	LLMF 6000 h Rated	94 %
LSF preheat 8,000 hours rated	99 %	LLMF 8000 h Rated	93 %
LSF preheat 16,000 hours rated	97 %	LLMF 12000 h Rated	92 %
LSF preheat 20,000 hours rated	84 %	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Colour Code	830 [ CCT of 3,000 K]	Power (Rated) (Nom)	49.2 W
Luminous flux (nom.)	4900 lm	Lamp current (nom.)	0.255 A
Luminous flux (rated) (nom.)	4375 lm		
Colour designation	Warm white (WW)	Temperature	
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W	Design temperature (nom.)	35 °C
Correlated Colour Temperature (Nom)	3000 K		

# MASTER TL5 High Output

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Cap-base information	Green Plate
Bulb shape	T5 [ 16 mm (T5)]

## Approval and Application


Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	54 kWh

## Product Data

Full product code	871150063954755
-------------------	-----------------

Order product name	MASTER TL5 HO 49W/830 SLV/40
EAN/UPC – product	8711500639547
Order code	63954755
Local order code	49830
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927927583055
SAP net weight (piece)	128.700 g
ILCOS code	FDH-49/30/1B-L/P-G5-16/1450



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 49W/830 SLV/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

## TL5 HO 49W/830

## Photometric data

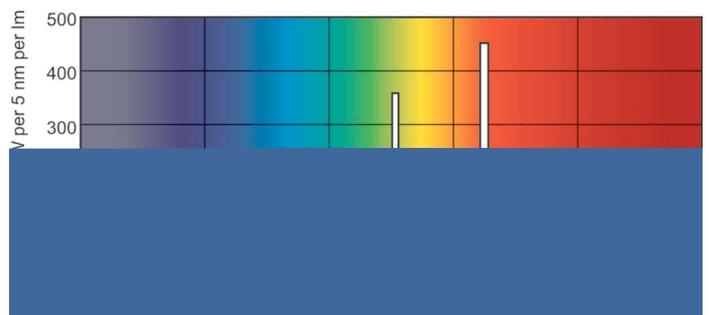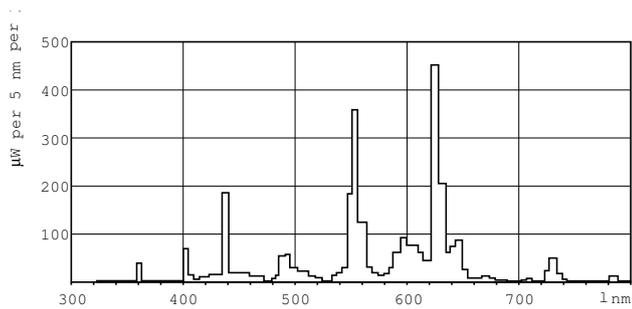


## Lightcolour /830

## Lightcolour /830


# MASTER TL5 High Output

## Lifetime

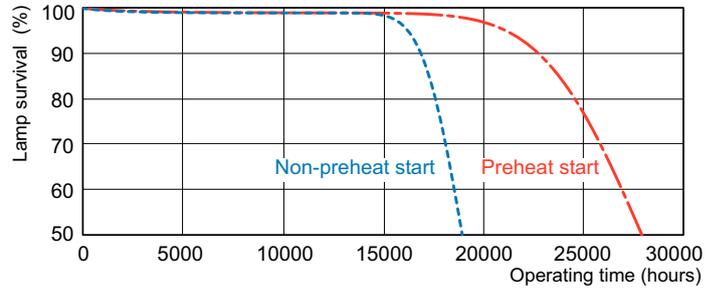

LDLE\_TL5-HO8\_0001-Life expectancy diagram

LDLE\_TL5-HO8\_0002-Life expectancy diagram

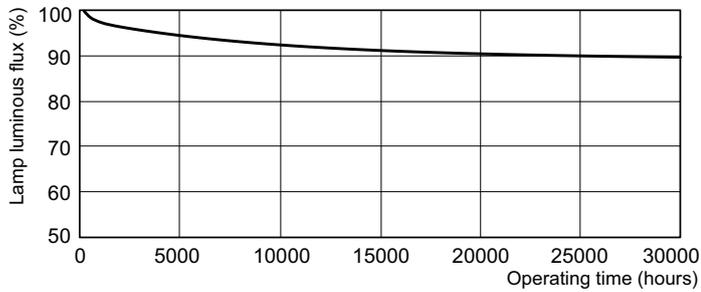

LDLM\_TL5-HO8\_0001-Lumen maintenance diagram

