

PHILIPS

Lighting



MASTER TL-D Super 80

MASTER TL-D Super 80 36W/865 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Luminous efficacy (rated) (nom.)	
Cap base	G13 [Medium Bi-Pin Fluorescent]		84 lm/W
Life to 10% failures (nom.)	12000 h	Colour rendering index (nom.)	85
Life to 50% failures (nom.)	15000 h	LLMF 2000 h Rated	96 %
Life to 50% failures preheat (nom.)	20000 h	LLMF 4000 h Rated	95 %
LSF 2000 h Rated	99 %	LLMF 6000 h Rated	94 %
LSF 4000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF 6000 h Rated	99 %	LLMF 12000 h Rated	92 %
LSF 8000 h Rated	99 %	LLMF 16000 h Rated	91 %
LSF 12000 h Rated	89 %	LLMF 20000 h Rated	90 %
LSF 16000 h Rated	33 %		
LSF 20000 h Rated	2 %		
Light Technical		Operating and Electrical	
Colour Code	865 [CCT of 6,500 K]	Power (Rated) (Nom)	36.0 W
Luminous flux (nom.)	3250 lm	Lamp current (nom.)	0.440 A
Luminous flux (rated) (nom.)	3250 lm		
Colour designation	Cool Daylight		
Correlated Colour Temperature (Nom)	6500 K		
		Temperature	
		Design temperature (nom.)	25 °C

MASTER TL-D Super 80

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application


Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy consumption kWh/1,000 hours	42 kWh

Product Data

Full product code	871150063207440
Order product name	MASTER TL-D Super 80 36W/865 ISL/25

EAN/UPC – product	8711500632074
Order code	63207440
Local order code	36865
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	927921086544
SAP net weight (piece)	135.000 g
ILCOS code	FD-36/65/1B-E-G13


Dimensional drawing

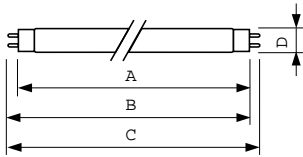


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 36W/865 ISL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-D 36W/865

Photometric data

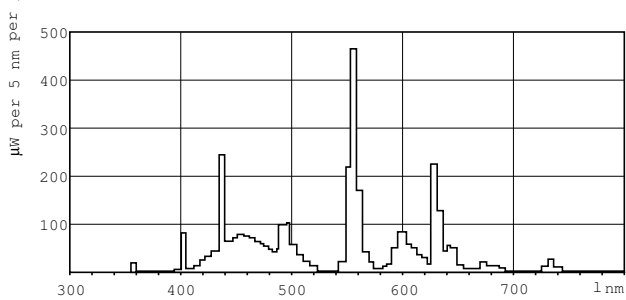

Lightcolour /865

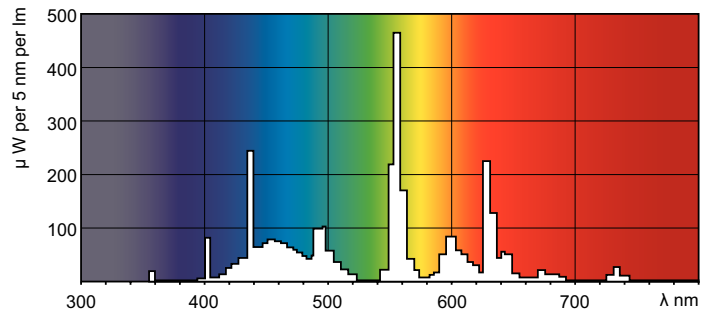

Lightcolour /865

MASTER TL-D Super 80

Lifetime



LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram



LDLM_TL-D8_0001-Lumen maintenance diagram

