



# MASTER TL5 High Output

## MASTER TL5 HO 80W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

#### **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

**General Information** 

Cap base	G5 [ G5]			
Life to 50% failures preheat (nom.)	30000 h			
Features	HO Alto® [ High Output Alto]			
System description	High Output (HO)			
LSF preheat 2,000 hours rated	99 %			
LSF preheat 4,000 hours rated	00 hours rated 99 %			
LSF preheat 6,000 hours rated	99 %			
LSF preheat 8,000 hours rated	99 %			
LSF preheat 16,000 hours rated	97 %			
LSF preheat 20,000 hours rated	84 %			
Light Technical				
Colour Code	840 [ CCT of 4,000 K]			
Luminous flux (nom.)	7000 lm			
Luminous flux (rated) (nom.)	6550 lm			
Colour designation	Cool White (CW)			
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	88 lm/W			
Correlated Colour Temperature (Nom)	4000 K			

Luminous efficacy (rated) (nom.)	82 lm/W
Color rendering index (max.)	85
Colour-rendering index (min.)	80
Colour rendering index (nom.)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Rated) (Nom)	79.8 W
Lamp current (nom.)	0.530 A
Temperature	
Design temperature (nom.)	35 ℃


Datasheet, 2021, March 18 data subject to change

# **MASTER TL5 High Output**

Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Cap-base information	Green Plate		
Bulb shape	T5 [ 16 mm (T5)]		
Approval and Application			
Energy efficiency label (EEL)	А		
Mercury (Hg) content (nom.)	1.4 mg		
Energy consumption kWh/1,000 hours	88 kWh		
Product Data			
Full product code	871150071045155		

MASTER TL5 HO 80W/840 SLV/40		
8711500710451		
71045155		
80840		
1		
40		
927929584057		
128.700 g		
FDH-80/40/1B-L/P-G5-16/1450		


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm
80W/840 SLV/40					

## TL5 HO 80W/840

## Photometric data

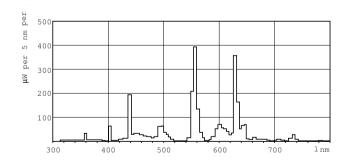

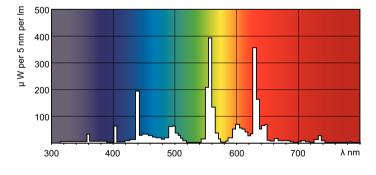


Lightcolour /840

Lightcolour /840

## **MASTER TL5 High Output**


#### Lifetime



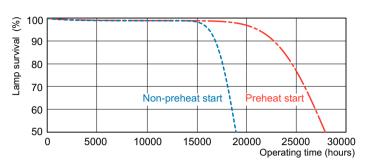

#### LDLE\_TL5-HO8\_0001-Life expectancy diagram



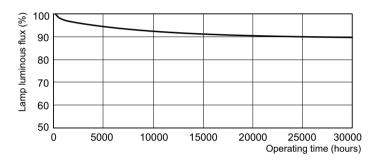

LDLM\_TL5-HO8\_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.