



MASTER PL-T 4 Pin

MASTER PL-T 18W/840/4P 1CT/5X10BOX

Energy saving compact fluorescent lampCompact long-arc low-pressure mercury discharge lampEnvelope consists of 6 parallel narrow fluorescent tubes

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	GX24Q-2 [GX24q-2]
Life to 50% failures preheat (nom.)	13000 h
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	98 %
LSF preheat 6,000 hours rated	97 %
LSF preheat 8,000 hours rated	90 %
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	1200 lm
Luminous flux (rated) (nom.)	1200 lm
Colour designation	Cool White (CW)
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (min.)	67 lm/W
Colour rendering index (nom.)	82
LLMF 2000 h Rated	92 %

LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	16.5 W
Lamp current (nom.)	0.210 A
Temperature	
Design temperature (nom.)	28 ℃
Controls and Dimming	
Dimmable	Yes


Datasheet, 2021, March 17 data subject to change

MASTER PL-T 4 Pin

Mechanical and Housing	
Cap-base information	4P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	20 kWh
Product Data	
Full product code	871150061099770
Order product name	MASTER PL-T 18W/840/4P 1CT/5X10BOX

EAN/UPC – product	8711500610997
Order code	61099770
Local order code	18PLT8404PINCS
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
SAP material	927914484071
SAP net weight (piece)	58.000 g
ILCOS code	FSM-18/40/1B-E-GX24q=2

Dimensional drawing




4 T	(u u)
PL-T 18W/840/4P M	

Product D (max) A (max) B (max) C (max) MASTER PL-T 18W/840/4P 1CT/ 41.0 mm 71.7 mm 96.0 mm 111.7 mm 5X10BOX

Photometric data

0 -00

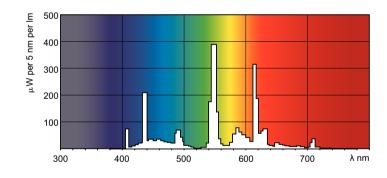


Lightcolour /840

Lightcolour /840


MASTER PL-T 4 Pin


Lifetime



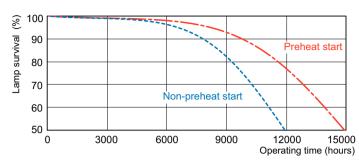

LDLE_PLT4PN_0001-Life expectancy diagram



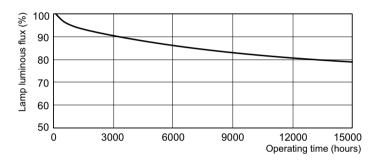

LDLM_PLT4PN_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.