



# **MASTER PL-T 2 Pin**

## MASTER PL-T 26W/840/2P 1CT/5X10CC

Energy saving compact fluorescent lampCompact long-arc low-pressure mercury discharge lampEnvelope consists of 6 parallel narrow fluorescent tubes

#### **Warnings and Safety**

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- · Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

GX24D-3 [ GX24d-3]		
6500 h		
10000 h		
99 %		
98 %		
92 %		
78 %		
840 [ CCT of 4,000 K]		
1800 lm		
1725 lm		
Cool White (CW)		
·		
4000 K		

Colour rendering index (nom.)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	26.0 W
Lamp current (nom.)	0.335 A
Temperature	
Design temperature (nom.)	28 ℃
Controls and Dimming	
Dimmable	No

Datasheet, 2021, March 17 data subject to change

## **MASTER PL-T 2 Pin**

Mechanical and Housing	
Cap-base information	2P
Approval and Application	
Energy efficiency label (EEL)	В
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	32 kWh
Product Data	

871150061113070


MASTER PL-T 26W/840/2P 1CT/5X10BOX

EAN/UPC – product	8711500611130		
Order code	61113070		
Local order code	26PLT8402PINCS		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	50		
SAP material	927914584071		
SAP net weight (piece)	66.000 g		
ILCOS code	FSM-26/40/1B-I-GX24d=3		

## Dimensional drawing


Full product code


Order product name



Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T 26W/840/2P 1CT/	41 mm	86.7 mm	111.0 mm	134.2 mm
5X10BOX				

#### Photometric data

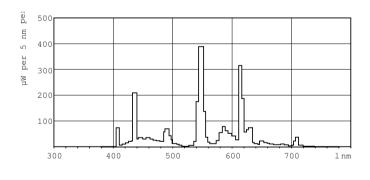

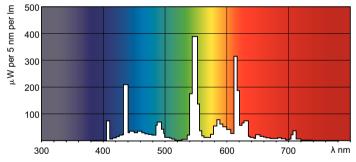



Lightcolour /840

Lightcolour /840


## **MASTER PL-T 2 Pin**


#### Lifetime

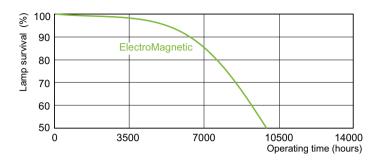



#### LDLE\_PLT2PN\_0001-Life expectancy diagram



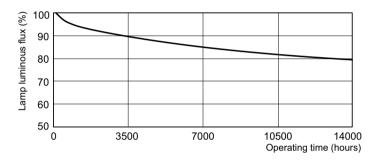

LDLM\_PLT2PN\_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.