



# MASTERColour CDM-TC

## MASTERColour CDM-TC 35W/842 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Lumen maintenance 2,000 hours (min.)	
Cap base	G8.5 [ G8.5]	Lumen maintenance 2,000 hours (nom.)	75 %
Operating position	UNIVERSAL [ Any/Universal]	Lumen maintenance 5,000 hours (min.)	70 %
Life to 5% failures (nom.)	6000 h	Lumen maintenance 5,000 hours (nom.)	80 %
Life to 10% failures (nom.)	8000 h	Chromaticity coordinate X (nom.)	0.374
Life to 20% failures (nom.)	9000 h	Chromaticity coordinate Y (nom.)	0.369
Life to 50% failures (nom.)	12000 h	Correlated Colour Temperature (Nom)	4200 K
ANSI code HID	-	Luminous efficacy (rated) (nom.)	79 lm/W
		Colour rendering index (nom.)	85
Light Technical		Operating and Electrical	
Colour Code	842 [ CCT of 4,200 K]	Power (Rated) (Min)	39.0 W
Luminous flux (rated) (nom.)	3100 lm	Power (Rated) (Nom)	39.1 W
Colour designation	Cool White (CW)	Ignition supply voltage (max.)	198 V
Lumen maintenance 10,000 hours (nom.)	70 %		

# MASTERCcolour CDM-TC

Ignition supply voltage (min.)	198 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	93 V
Voltage (Min)	77 V
Voltage (Nom)	85 V

## Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	3 min

## Mechanical and Housing

Lamp Finish	Clear
Bulb material	UV-Block Quartz
Bulb shape	T14 [ T 14 mm]

## Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.7 mg
Energy consumption kWh/1,000 hours	43 kWh

## UV

PET (NIOSH) (min.)	8 h/500lx
--------------------	-----------

Damage factor D/fc (max.)	0.5
---------------------------	-----


## Luminaire Design Requirements

Bulb temperature (max.)	500 °C
Pinch temperature (max.)	300 °C

## Product Data

Full product code	871150020957315
Order product name	MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12
EAN/UPC – product	8711500209573
Order code	20957315
Local order code	35CDMTC942
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928093805125
SAP net weight (piece)	10.000 g
ILCOS code	MT/UB-35/842-H-G8.5-17/85

## Dimensional drawing



CDM-TC 35W/842 G8.5


Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-TC 35W/842 G8.5 1CT/12	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm

# MASTERC colour CDM-TC

## Photometric data



## Lifetime

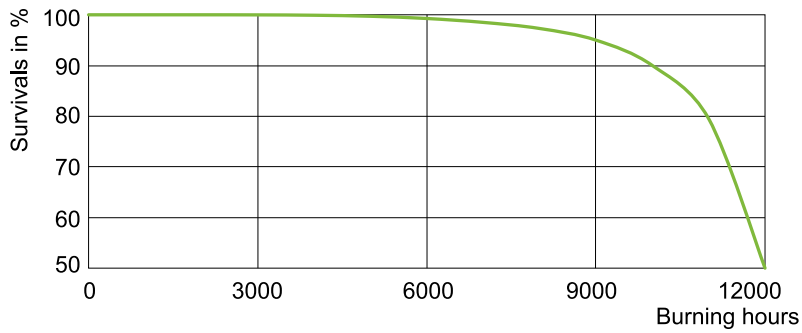

LDLE\_CDM-TC\_0001-Life expectancy diagram

