


24V 5A Relay On A Plate

Part No. **BF376**

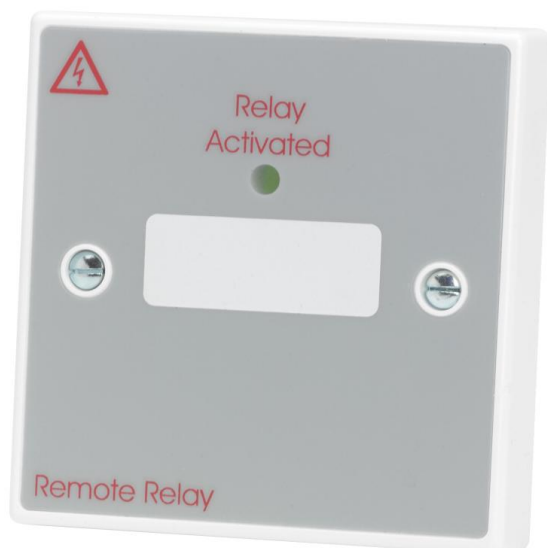

Overview

A general purpose, double-pole, polarised 24V 5A relay designed for use in 24V fire alarm systems.

Incorporates a high intensity LED which illuminates red when the relay is active.

Can be connected to a suitable control panel relay output or a standard polarised fire alarm sounder circuit to operate door retaining magnets, rollershutter doors, etc.

Can be mounted on 25mm flush or surface mount back boxes.

Technical Specifications

| | |
|----------------------------------|---|
| Activation current | Typically 30mA @ 24VDC. |
| Indicators | Red Relay Activated LED. |
| Connections | +V; -V (Supply); NC; C; NO (SW1 & SW2). Contact rating @ 24VDC is 5A (resistive) 2A (inductive); Contact rating @ 240VAC is 5A (resistive) 2A (inductive) |
| Product dimensions (mm) | 85 W x 85 H x D 27mm (Can be mounted on a standard UK 25mm single gang flush or surface back box). |
| Construction & finish | White PVC plate; Light grey label; Silver nickel contacts. |
| IP Rating | IP40. |
| Weight | 78g. |
| Operating conditions/temperature | -10°C to +60°C. |



T 01942 322744 E sales@c-tec.co.uk
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom