

**Product Code:** CT202C

**Description:** 250V~ 20A 4 Pole Complete (Screw Cable Clamps) Connector



### General Information

<b>Male Dimensions (CT201M)</b>	54mm (W) x 30mm (D) x 22mm (H)
<b>Female Dimensions (CT202F)</b>	69mm (W) x 50mm (D) x 23mm (H)
<b>Material Composition</b>	Cover: Polycarbonate Base & Terminal Housing: Nylon (PA66) Terminals: Silver Plated Brass Terminal Screws: Steel and Yellow Passivated
<b>Maximum Voltage</b>	250V~ 50Hz
<b>Load Rating</b>	20A
<b>Rated Impulse Voltage</b>	4kV
<b>Terminal Capacity</b>	3 x 2.5mm <sup>2</sup> Max. T&E, 3 x 1.5mm <sup>2</sup> Max. Flex
<b>Termination Layout</b>	(CT201M) A - N - E - L (CT202F) L - E - N - A - Loop
<b>Inner Core Strip Length</b>	Male: L&N: 20mm; E: 28mm; Female: L&N: 35mm; E: 43mm
<b>Conductor Strip Length</b>	10mm
<b>Cable Grip</b>	Screw Cable Clamps
<b>Cutout Required</b>	Will pass through a 55mm round hole
<b>Ingress Protection</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	EN 61535: 2009 + A1: 2013 BS 5733: 2010 + A1: 2014



### Additional Information

Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.


EU Design Registration: 001787862, EU Design Reg. 805882

Product Code: CT202C

Description: 250V~ 20A 4 Pole Complete (Screw Cable Clamps) Connector


## Wiring Example

MALE - CT201M

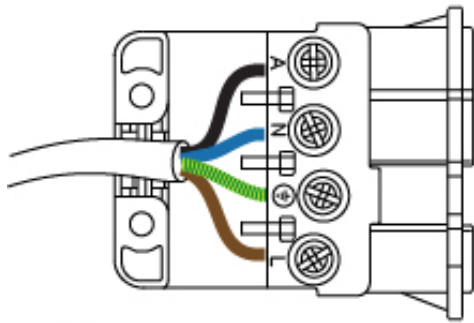

LOAD

FEMALE - CT202F

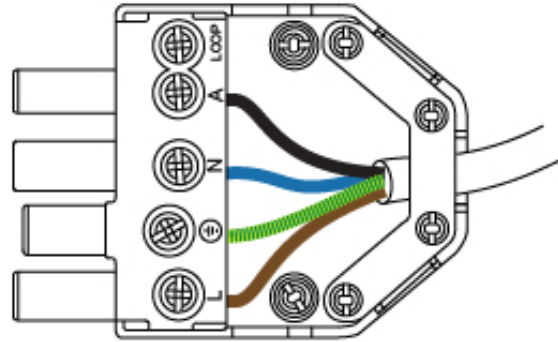

SUPPLY