


Constant Current LED Driver

Features:

- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Non-Dimmable

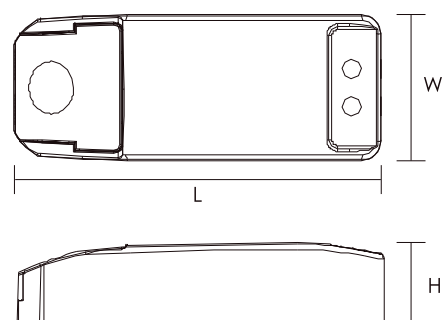

Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output current (mA)	Output voltage (V)	Min. Load (W)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature ta (°C)	Max. casing temperature tc (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
43816	220-240	12	350	2-34	0.7	0.80	81	<0.3	-20...+50	80	SELV	98x39x22	50
46896	220-240	20	350	2-58	0.7	0.80	85	<0.3	-20...+50	80	SELV	113x44x28	100