

Please read these instructions fully prior to initial use.

Every effort has been made to ensure that the guidance information on this sheet will enable the installation of the bulkhead to be carried out safely and correctly.

IMPORTANT

This product should be installed by a competent person and in accordance with the current IET Wiring Regulations. If in doubt, consult a qualified electrician.

SAFETY INFORMATION

Always switch off mains supply before servicing, fitting or replacing lamps. Always check the lamp is correct for the application, including its voltage and wattage. Never exceed the maximum wattage. Ensure the lamp is correctly located in the lampholder.

The luminaire is Class 1 construction and must be earthed. The index of protection is IP65.

INSTALLATION INSTRUCTIONS


1. Separate the diffuser from the body and remove lampholder and proceed as follows.
2. Place the body on firm surface, remove rear knockouts from inside of body using a suitable punch, striking sharply on the knockout near the periphery but away from the securing tags.

NOTE:

To maintain IP rating and weatherproof, fitting a suitable gasket (rubber) should be used when mounting on a BESA conduit box - fitted by M4 screws through holes provided on rear of fitting.

3. Remove required knockout M20. The body can then be fixed to normal surfaces using No.8 wood screws, where we advise a sealing compound be used around the screw heads to reduce the possibility of water ingress. A sealed termination should be made using M20 conduit, pyro or cable gland, assembled with locknuts/rings. The fibre washer provided is intended to be placed on outside of body.
4. Connect earth cable (green/yellow) to terminal marked (1). Heat resisting sleeving is provided to sleeve incoming cables live (red or brown) Neutral (black or blue).
5. Assemble and fit lamps as required.

NOTE:
If installing fittings horizontally (wall mounting), then a 60 watt lamp only should be used.

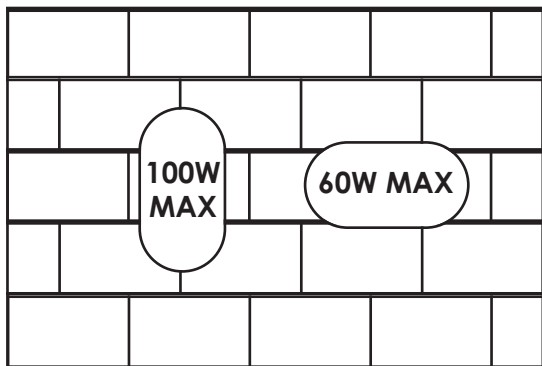

6. Do not over-tighten fixing screws. An effective weatherproof seal can be provided with moderate tightening of screws.

NOTE: Ceiling mounting & vertical wall 100W Max.

TECHNICAL INFORMATION

Power Rating: 230V AC~50Hz

IP Rating: IP65

Wattage: Max 100W B22 GLS (Lamp not supplied)
LED Lamp compatible

Class Type: 1

Housing: POLY / POLYR Clear Diffuser & Non-Corrosive Aluminium Body
POLYP Clear Diffuser & Black Polycarbonate Base

Dimensions: POLY / POLYR H130 x W240 x D100mm
POLYP H130 x W240 x D130mm

Conforms To: EN60598-2-1

GUARANTEE
*Your GreenBrook IP65 Bulkhead
is guaranteed for 1 year from
the date of purchase.
This is in addition to your statutory rights.*

EMC



PLEASE KEEP THESE INSTRUCTIONS SAFE FOR FUTURE REFERENCE



**GREEN
BROOK**
ELECTRICAL
WEST ROAD . HARLOW
ESSEX . CM20 2BG . UK
info@greenbrook.co.uk
www.greenbrook.co.uk