


**Product Code:** OA035AG

**Description:** 1 Gang 13A DP IP66 Weatherproof Switched Socket Unit

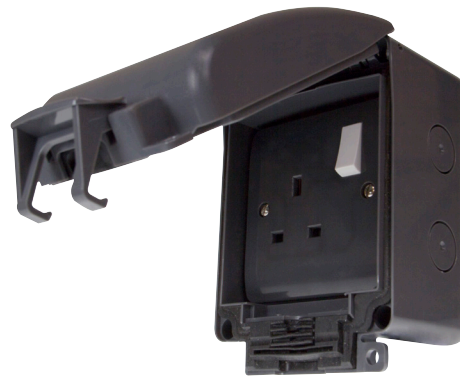

### General Information

<b>Dimensions</b>	87mm (W) x 158mm (H) x 90mm (D)	
<b>External Finish</b>	Anthracite Grey	
<b>Socket Finish</b>	Anthracite Grey With White Switches	
<b>Materials</b>	Cover, Housing & Clip: Polycarbonate Accessory Plate & Housing: Urea Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass	Seal & Gasket: Rubber Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel
<b>Maximum Voltage</b>	250V~ 50Hz	
<b>Load Rating</b>	13A	
<b>Accessory Fixing Centres</b>	60.3mm	
<b>Terminal Size</b>	5mmØ	
<b>Terminal Torque</b>	2.5Nm	
<b>Terminal Capacity</b>	3 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>	
<b>Double Pole</b>	Yes	
<b>Ingress Protection</b>	IP66	
<b>Termination Type</b>	Screw	
<b>Back Box Knockouts</b>	7 x 20mmØ	
<b>Operational Temperature</b>	-5°C to +40°C	
<b>Warranty</b>	5 Years	
<b>Standards</b>	BS 1363-2: 2016 +A1: 2018 BS EN 60529:1992+A2:2013 (Sections 13 & 14)	

### Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
All urea moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.  
All products have been independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.