



### FEATURES

- High-quality 175 lumen white 6500k COB LED
- Secondary rear 150 lumen white 6500k COB LED
- Extra 70 lumen white 6500k SMD LED top torch
- Ultra lightweight compact pocket size
- IK07 super tough nylon polymer construction
- 180° vertical folding head
- Strong magnetic base & dual rear magnets
- IP20 dust resistant
- USB Type-C charging - 2 ½ hours charge time
- Low voltage warning flash - reminds when charging is needed
- 1m high quality 1A USB type-C cable included

**BATTERY** - 3.7v 350mAh Li-ion Rechargeable Battery

**WEIGHT** - 60g


**DIMENSIONS** - folded 111.5 x 19.2mm  
extended 225 x 19.2mm

### CHARGING

1. Only use a 5v USB-C cable (max 1A).
2. Lift the charging port cover on the side of the light.
3. Plug the USB-C end of the cable into the charge port.
4. Plug the USB end of the cable into a USB charging port (do not exceed 5V 1A charging input or damage may occur).
5. Charge Time: 2 ½ hours

(PRODUCT CAN BE USED WHILE RECHARGING, HOWEVER BRIGHTNESS WILL DECREASE)

**\*\*Warranty void if not used with the specified chargers\*\***

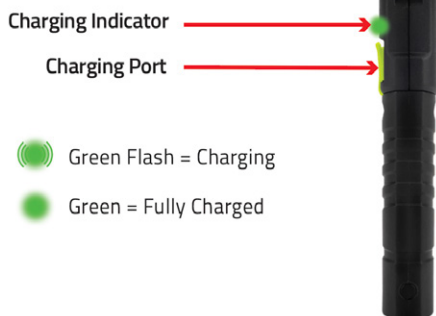

### ANSI FL1 Standard




Mode	Lumen	Beam Distance	Runtime
Top Torch	70	21 M	3 H
Main Floodlight - Low	75	11 M	6 H
Main Floodlight - High	175	18 M	3 H
Rear Floodlight	150	14 M	3 H

### OPERATION

**SWITCH SEQUENCE:** Top Torch > Main Floodlight Low > Main Floodlight High > Rear Floodlight > Off

**MEMORY FUNCTION:-** If left ON in any mode for 5+ seconds, the next press will turn OFF. Next press ON will return to last mode used.

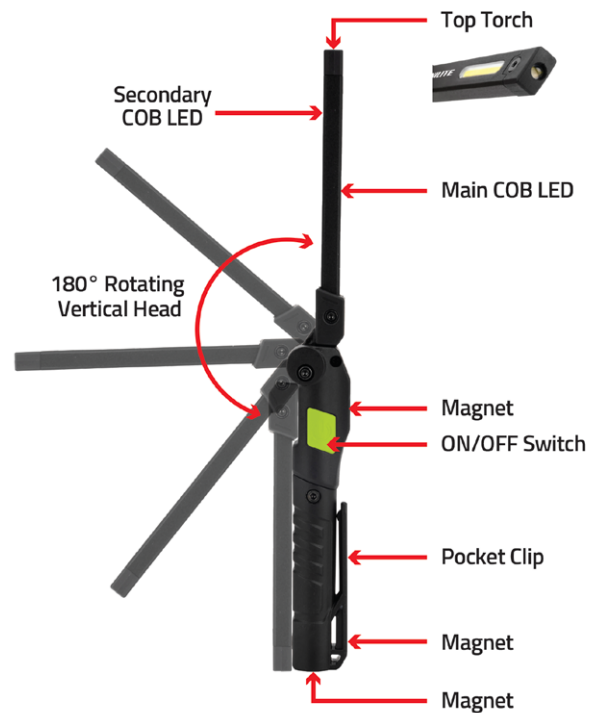

### ADVICE & IMPORTANT INFORMATION!

Do not look directly at the LED. Do not operate in direct sunlight or extreme temperature conditions (below -10°C or above 40°C). LEDs will become warm/hot when switched on; do not touch and never place LEDs face down on any surface - risk of fire!

Do not use the device if there is any visible damage to the housing, charge port or cable. Take care when using a USB plug adaptor, check for any damage. DO NOT exceed 5V 1A charging input or damage may occur to the battery.

The rechargeable battery will reach full performance after a few complete charging and discharging cycles.

To keep the rechargeable battery in optimum condition, it should be recharged every 3-6 months, especially if it is not being used for a long period of time. Always fully charge batteries before storage.

Always protect batteries from heat, intense sunlight, fire, water and moisture - danger of explosion!

If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if lithium battery fluid comes into contact with the eyes.

Children under 12 years of age should only use the product under adult supervision. Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.

Take care not to let the lenses come into contact with hard/sharp objects, damage/scratches to the lenses will affect light output.

If the product has been subjected to excessive moisture/water the warranty may be void.

This product has a 1 year standard warranty (or extended to 2 years once registered online at [WWW.UNILITE.CO.UK](http://WWW.UNILITE.CO.UK)) against manufacturing faults and defects. It does not cover normal wear and tear, modifications or attempt to modify the product; this will void the warranty and can be dangerous. Unilite warranties do not cover battery leaks or the use of incorrect chargers and cables that can damage batteries.

Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit. Please re-use or recycle packaging where possible.

Keep these instructions for future reference or for subsequent possessors.

