

## ACP350 Triple Pole Emergency Call Point with Dual Light and Buzzer



***The Securefast ACP350 triple pole call point is designed for optimum security and visibility.***

The ACP350 shows a green box when the unit is in the locked state. If the unit is activated by pressing the emergency panel the door will unlock and the unit will flash red in addition to a sounder being activated.


To stop false activation the ACP350 is supplied with a flip cover and may be reset with the key provided.

The ACP350 is triple pole with three normally open or closed contacts for your convenience.

ACP350	Triple Pole Call Point
ACP350K	Spare Key

### Features & Benefits



- Triple pole contact
- Resettable via supplied key
- Dual light activation confirmation
- Alarm sounder included (can be set to silent, interval or continuous)
- Clear hinged cover included
- Resettable activation panel
- Surface mount (can also be fitted flush)
- Input voltage 12-24V DC
- Easy to assemble and install
- Buzzer sound - 70db

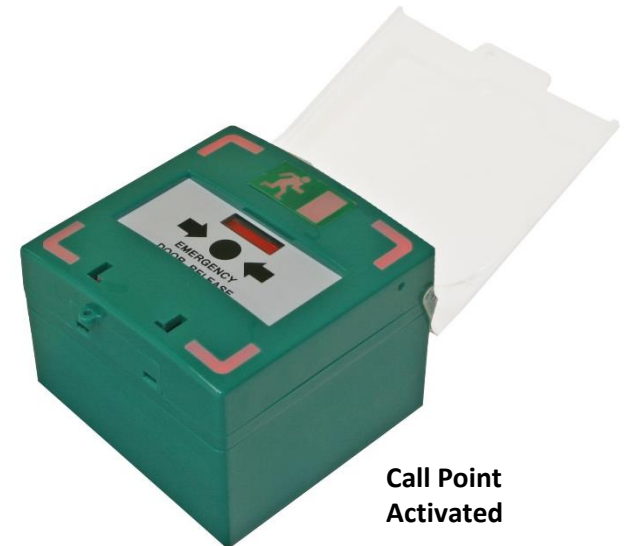

**Call Point Activated**

# ACP350 Triple Pole Emergency Call Point with Dual Light and Buzzer

Technical Information	
Power Supply	12V-24V DC
Operation Current	12V DC/18mA (Standby)/75mA (Operation) 24V DC/11mA (Standby)/41mA (Operation)
Buzzer	Set as silent, interval wailing or continuous wailing
Indicator	Dual-Colour (Red & Green) Red indicator to set blinking, on or off
Output	N.O/N.C/COM Output (Maximum load of 30V/3A)
Weight	192g
Dimensions (HxWxD)	64 x 93 x 90mm
Material	ABS, PC

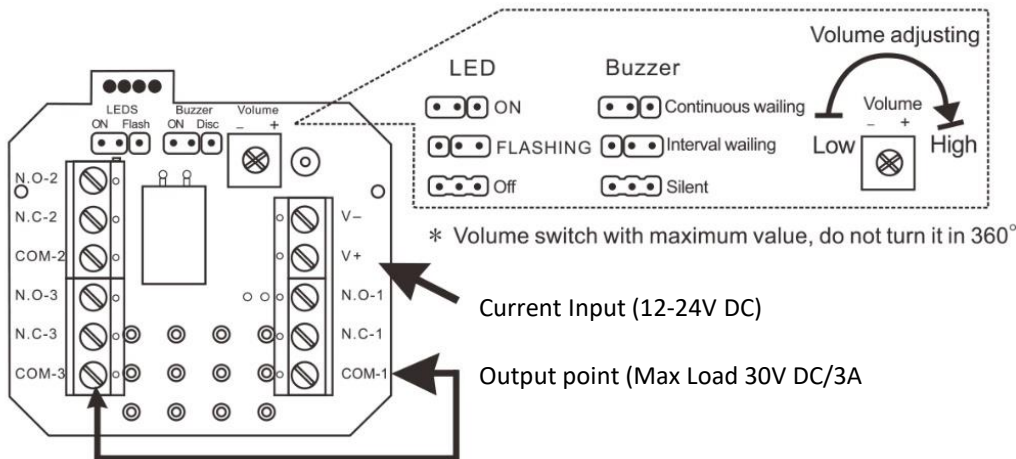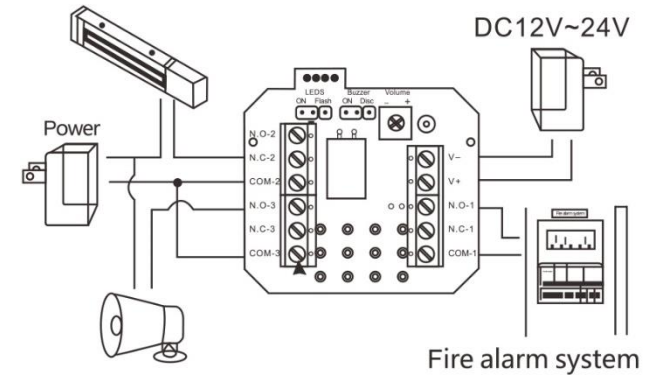

For further information contact:

**Securefast Limited**  
6, The Cedars Business Centre  
Avon Road, Cannock  
Staffordshire  
WS11 1QJ



**Call** > +44 (0) 1704 502 801

**Email** > sales@securefast.co.uk

**Visit** > www.securefast.co.uk