

OMNI FILAMENT GLS BULB B22 806LM 5.9W 2700K DIMMABLE 330 BEAM CLEAR FULL GLASS INTEGRAL

ILGLSB22DC055



Integral LED Omni Filament lamps utilise filament LED technology within a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. The warm 2700K light creates a cosy and intimate atmosphere.

These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Barcode:	5055788222460
Quick Order Code:	671830
Category:	Lamps
Range Name:	Omni
Product Type:	GLS
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2

Physical Data

Product Length (mm):	106
Product Width (mm):	60
Product Weight (g):	32
Material:	Aluminium, Glass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Glass shell, Filament strip, Aluminium base
Globe Finish:	Clear
Globe Type:	GLS
Bulb Fixing:	Pendant, Wall, lamp stand, table lamp
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	5.9
Power Consumption (W) :	5.9
Power Factor:	0.7
Voltage Range (v):	220-240



Wattage equivalent (W):	60
Amperage (mA):	35
Dimming:	Mains dim
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	136
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700 - Warm
Colour Temperature Name:	Warm
Beam Angle:	330
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	50000

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	D
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

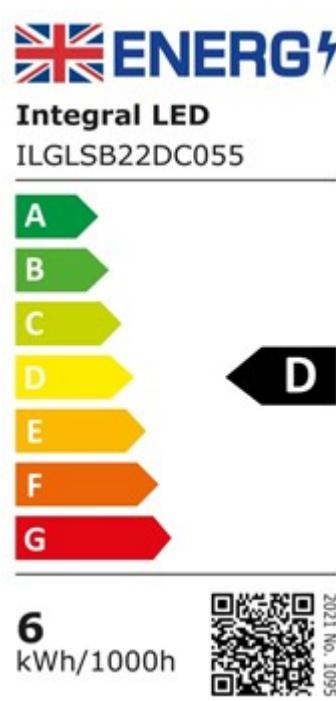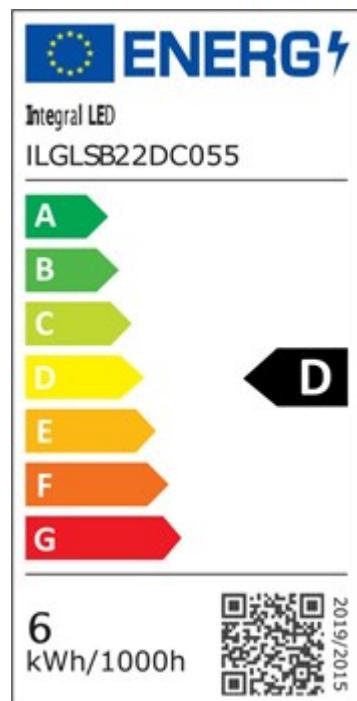

Packaging

Barcode:	5055788222460
Single box qty:	1
Package Weight (g):	60
Package Length (mm):	65
Package Width (mm):	65
Package Depth (mm):	120
Inner Carton Barcode:	05055788222545
Qty per Inner Carton :	10
Inner Carton Length (mm):	340
Inner Carton Width (mm):	140
Inner Carton Depth (mm):	130
Outer Carton Barcode:	05055788222620
Qty per Outer Carton:	40
Outer Carton Length (mm):	358
Outer Carton Width (mm):	305
Outer Carton Depth (mm):	290

Integral-led.com - Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE