

DATA SHEET

CLEVELAND


Cleveland LED Single 6Ft IP65 Non Corrosive M3 840

IP65 Non-Corrosive LED Fitting
 Strong PC Enclosure & Stainless Steel Clips
 ENEC Flicker Free Driver



GENERAL INFORMATION	
Product Code	NCV1X6/M3/840
Product Range	Cleveland
Product Category	Industrial
Fixing Method	Surface/Suspended
IP Rating	65
IK Rating	IK10
Warranty	5 Years 20000 Hours
DIMENSION/WEIGHT	
Dimensions (L x W x H) (mm)	L=undefined, W=65, H=70
Cut-out Size (mm)	N/A
Product Weight (Kg)	2.42
CONSTRUCTION	
Body Material	PC
Body Colour	Grey
Optical Material	PC
Optical Finish	Opal
Termination	4x2x2.5mm sq. Push In Terminal
Driver - Integral or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight incl. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	5060
Power Consumption (W)	46
Efficacy (l.lm/c.W)	110
Operating Temp. (Min/Max)	0°C - 25 °C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L70:B10 50000
SDCM	<5
ELECTRICAL INPUT	
Voltage (V)	220-240V AC
Operating Frequency	50
In Rush	<25A
Drivers per MCB*	B10=18 B16=25 C10=25 C16=35
Class	Class 1
Power Factor	>0.95
Cable Entry	Side /Base
ELECTRICAL OUTPUT	
Forward Current (mA)	690
Forward Voltage (Vf)	57
EMERGENCY DATA	
Mode of Operation	Maintained
Battery Duration	3 Hours
Battery Type	NiCd
Battery Specification	6V 1.8Ah
Ballast Lumen Factor (BLF)	4.20%
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN Number	5055943071858

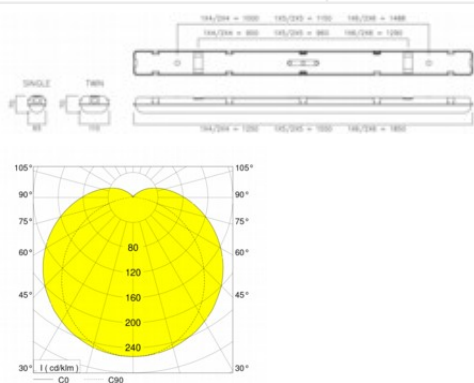

* GUIDE ONLY