

**430042-H3**

**Technical Specification**

Sutton Batten 6ft Single 38W 4000K White H3



## Product Information

<b>Product Group</b>	Linear Lighting
<b>Description</b>	Sutton Batten 6ft Single 38W 4000K White H3
<b>Product Name</b>	Sutton Batten
<b>Product Type</b>	LED Linear
<b>Product Colour</b>	White RAL9016
<b>Warranty</b>	5 Years

## General Information

<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK04
<b>Operating Temperature</b>	0 - 30 °C
<b>Beam Angle</b>	120 Degree
<b>Body Material</b>	Aluminium

**430042-H3**

**Technical Specification**

**Diffuser Material** Polycarbonate

**Mounting Type** Surface

**BESA Mount** true

## LED Information

**LED Type** SMD

**LED Manufacturer** San'an

**Lumen Output +/- 10%** 4158lm

**Lumens Per Circuit Watt** 119Lm/W

**LED Lifetime L70** 50000 h

**CCT** 4000K

**CRI** <80

## Electrical Information

**Class** Class I

**Connection Type** Push Terminal

**Circuit Wattage** 34.9W

## Driver Information

**Driver Brand** Tridonic

**Input Voltage** 220 -240V AC

**Input Current** 0.17A

**Operating Frequency** 50 - 60Hz

**Power Factor** <0.90

430042-H3

Technical Specification

## Emergency Information

Battery Type	Ni-Cd
Battery Capacity	4500mAh
Battery Warranty	2 years
Recharge Time	24 h
Emergency Type	Maintained
Test Procedure	Manual
Emergency Duration	3 Hours
Emergency Output (Lm)	400 lm
Inverter Pf	0.82

## Shipping Information

Product Weight	1.8Kg
Carton Dimensions	1555mm x 300mm x 160mm
Qty Per Outer Carton	8
Packaged Weight ea.	2.15Kg
Barcode	5055379535733

## Certification

Manufactured in Accordance to	BS EN 60598-1   BS EN 60598-2-22
CE Marked	Yes
Origin of Manufacturer	China

## Product Dimensions

**430042-H3**

**Technical Specification**

**(C)** 1829 mm

---

**(B)** 64 mm



---

**(A)** 62 mm

---

430042-H3

Technical Specification

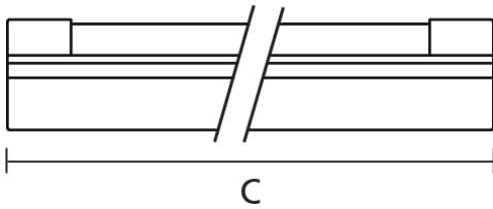

Datasheet generated by <https://www.onetimepim.com>, last updated: Friday, 02 July 2021 01:04:35