



Arno

Arno 18W Twin output thin profile interior batten with integrated LED

The Kosnic Arno Slimline Integrated Battens utilize high performance LEDs to offer outstanding lumen efficiency within a very economic package. The battens are a low-profile design suitable for a wide range of general lighting applications from commercial premises to warehouses, factories and garages.

ARN2FT18-W40 (06258)

Specification

Voltage	220-240Vac 50-60Hz
Voltage (eg 220-240 Vac 50/60Hz)	220-240Vac 50/60Hz
Current (mA)	82
Rated Power (W)	18
CCT Words	Cool White
CCT (K)	4000
Nominal Lifetime (h)	40000
L70B50 Lifetime (h)	60000
L80B10 Lifetime (h)	50000
L90 Lifetime (h)	40000
Total Luminous Flux (lm)	1980
Power Factor	0.95
Blue Light Hazard	RG1
Glow wire temperature(°C)	850
Dimensions L x W x D (mm)	645 x 75 x 31 x
Weight (kg)	0.25
In-rush current (peak/duration) (A)	25A/110 µs
Protection Rating	Class II
IK Rating	IK04
Length (mm)	615
IP Rating	IP20
Ambient Temperature Range (°C)	-20 to 40
Lamp Cap	N/A
Depth (mm)	645


Light Source Specification

Lighting Technology Used	LED
Directional / Non Directional (DLS/NDLS)	NDLS
Light Source Cap Type (or other interface)	Wires

Mains / Non-Mains (MLS/NMLS)	MLS
Connected Light source (Y/N)	N
Colour Tunable Light Source (Y/N)	N
High Luminance Light Source (Y/N)	N
Anti-Glare Shield (Y/N)	N
Dimmable (Y/N/Specific dimmer)	N
Energy Consumption in on-mode (kWh/1000H)	18
Energy Efficiency Class (NEW FORMULA)	E
Useful Luminous Flux (lm)	1980
Beam Angle correspondence (in 360°/120°/90°)	in 360°
CCT	4000
On-Mode Power (Pon) (W)	18
Standby Power (Psb) (W)	0
Networked Standby Power (Pnet) (W)	N/A
CRI	82
CRI (min)	80
CRI (max)	84
Height (mm)	31
Width (mm)	75
Depth (mm)	645
Claim of Equivalent Power? (Y/N)	N
Equivalent Power (W)	N/A
Chromaticity Co-Ordinates (X)	0.380
Chromaticity Co-Ordinates (Y)	0.375
Peak Luminous Intensity (DLS) (cd)	N/A
Beam Angle (DLS)	N/A
Beam Angle (min)(DLS)	N/A
Beam Angle (max) (DLS)	N/A
R9 CRI (LED/OLED)	1
Survival Factor (x.xx)	0.9

Lumen Maintenance Factor (x.xx)	0.96
Displacement Factor	0.95
Colour Consistency in Mcadam Ellipses (Mains LED/OLED)	6
LED light source replaces fluorescent without integrated ballast of particular wattage (Mains LED/OLED) (Y/N)	N
Replacement W Claim (Mains LED/OLED) (W)	N/A
Flicker metric (pst LM) (x,x)	0.2
Stroboscopic effect metric (SVM) (x,x)	0.6

Technical Drawings

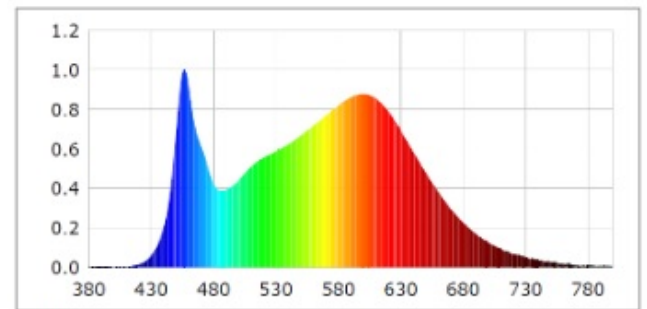

4000K