



## Echo II

### Echo II LED Circular highbay IP65

Kosnic's Echo II High Bay luminaire provides energy savings and high performance, replacing conventional lighting in general industrial areas, manufacturing, warehousing, leisure facilities and retail environments. The Echo High Bay is supplied with an eyelet for suspension mounting (suspension chain not supplied) and a range of optional shades. There are also emergency module and microwave sensor options available.

**ECH100-W50** (06399)

## Specification

Voltage (eg 220-240 Vac 50/60Hz)	100-240Vac 50/60Hz
Current (mA)	450
Rated Power (W)	100
CCT Words	Day Light
CCT (K)	5000
Beam Angle(°)	90°
Nominal Lifetime (h)	40000
L70B50 Lifetime (h)	54000
L80B10 Lifetime (h)	54000
L90 Lifetime (h)	31000
Total Luminous Flux (lm)	14500
Power Factor	0.96
Blue Light Hazard	RG1
Glow wire temperature(°C)	650
Dimensions L x W x D (mm)	175*φ259mm
Weight (kg)	2.55
In-rush current (peak/duration) (A)	74 A /250 us
Protection Rating	Class I
IK Rating	IK08
IP Rating	IP65
Ambient Temperature Range (°C)	-20 to 40
Emergency Luminous Flux (lm)	900
Depth (mm)	259

## Light Source Specification

Lighting Technology Used	LED
Directional / Non Directional (DLS/NDLS)	DLS
Light Source Cap Type (or other interface)	Wires
Mains / Non-Mains (MLS/NMLS)	NMLS


Connected Light source (Y/N)	N
Colour Tunable Light Source (Y/N)	N
High Luminance Light Source (Y/N)	N
Anti-Glare Shield (Y/N)	N
Dimmable (Y/N/Specific dimmer)	N
Energy Consumption in on-mode (kWh/1000H)	94
Energy Efficiency Class (NEW FORMULA)	D
Useful Luminous Flux (lm)	12200
Beam Angle correspondence (in 360°/120°/90°)	in 120°
CCT	5000
On-Mode Power (Pon) (W)	94
Standby Power (Psb) (W)	0
Networked Standby Power (Pnet) (W)	N/A
CRI	82
CRI (min)	80
CRI (max)	84
Height (mm)	64
Width (mm)	259
Depth (mm)	259
Claim of Equivalent Power? (Y/N)	N
Equivalent Power (W)	N/A
Chromaticity Co-Ordinates (X)	0.344
Chromaticity Co-Ordinates (Y)	0.358
Peak Luminous Intensity (DLS) (cd)	7000
Beam Angle (DLS)	90
Beam Angle (min)(DLS)	85
Beam Angle (max) (DLS)	95
R9 CRI (LED/OLED)	4
Survival Factor (x.xx)	0.9
Lumen Maintenance Factor (x.xx)	0.96

Displacement Factor	N/A
Colour Consistency in Mcadam Ellipses (Mains LED/OLED)	N/A
LED light source replaces flourescent withouth integrated ballast of particular wattage (Mains LED/OLED) (Y/N)	N/A
Replacement W Claim (Mains LED/OLED) (W)	N/A
Flicker metric (pst LM) (x,x)	N/A
Storboscopic effect metric (SVM) (x,x)	N/A
Light Source Supply	240Vdc 390mA

## Optional Gears and Accessories

Component 1	High Bay Emergency Module EMHB08
Component 2	Self-Test High Bay Emergency Module EMHB08/ST
Accessories 1	Shade KPT-KHBEC1-S6

## Technical Drawings

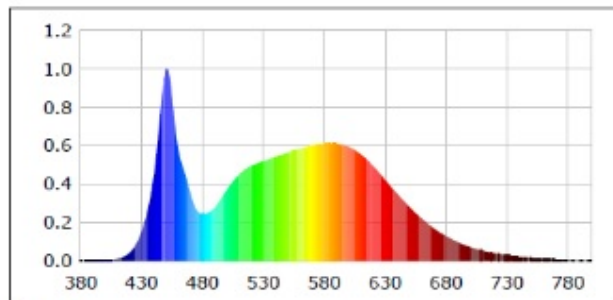

5000K

